

LogiCORE IP Video Deinterlacer v2.00.a

Product Guide

PG017 April 24, 2012

Table of Contents

Chapter 1: Overview

Feature Summary	8
Licensing	9

Chapter 2: Product Specification

Standards Compliance	11
Performance	11
Resource Utilization.....	12
Core Interfaces and Register Space	15

Chapter 3: Customizing and Generating the Core

Control Values.....	27
CORE Generator Tool Graphical User Interface (GUI)	28
EDK pCore GUI.....	28
Video Deinterlacer Core Interfaces	30
Parameter Values in the XCO File	32
Output Generation.....	33

Chapter 4: Designing with the Core

Deinterlacing	35
T1 and T2	36
Cross Fade Ratio	36
Initial State	37
Architecture.....	38
Memory Controller.....	38
I/O Interface and Timing	40
Clocking.....	50
Resets.....	51
Protocol Description	51

Chapter 5: Constraining the Core

Required Constraints.....	52
Device, Package, and Speed Grade Selections.....	52
Clock Frequencies.....	52
Clock Management	52
Clock Placement	52
Banking.....	53
Transceiver Placement	53

I/O Standard and Placement	53
Chapter 6: Detailed Example Design	
Case 1: SD480i to SD480p	54
Case 2: HD1080i to HD1080p	55
Directory and File Contents	56
Demonstration Test Bench	58
Simulation	58
Messages and Warnings	58
Appendix A: Verification, Compliance, and Interoperability	
Simulation	59
Hardware Testing	60
Appendix B: Migrating	
Parameter Changes in the XCO File	61
Port Changes	61
Functionality Changes	61
Appendix C: Debugging	
Step 1: Video Pass Through Bring Up	62
Step 2: Basic Deinterlacing	62
Step 3: Full Deinterlacing Using Memory Controller	63
Step 4: Check the Algorithms for Incorrect Video Output	63
Step 5: Pull-down Testing and Pitfalls	64
Appendix D: Application Software Development	
pCore Driver Files	65
pCore API Functions	65
Appendix E: C Model Reference	
Unpacking and Model Contents	68
Installation	70
Software Requirements	70
Interface	70
Example Code	78
Command Line Options in Detail	79
Simulation Options in Detail	86
Appendix F: Additional Resources	
Xilinx Resources	88
Solution Centers	88

References	88
Technical Support	89
Ordering Information	89
Revision History	89
Notice of Disclaimer	90

Introduction

The Xilinx Video Deinterlacer LogiCORE™ IP provides a flexible video processing block for deinterlacing video into a progressive video structure. The core supports image sizes up to 2kx2k with YUV 4:4:4, 4:2:2 or 4:2:0 and RGB image formats. The core is programmable through a comprehensive register interface for setting and controlling internal operations and more using logic or a microprocessor. An interrupt status mechanism is used for smooth transitioning of changing input video streams to alternative raster structures and planes. The LogiCore IP is provided with two different interfaces: General Purpose Processor and EDK pCore AXI-4 Lite.

Features

- Supports video frame sizes up to 2048x2048 pixels
- Supports video frames sizes down to 128x128
- Supports YUV-4:4:4, 4:2:0 and 4:2:0 and RGB color spaces
- Supports 8, 10 or 12-bit color depth per plane
- Provides smooth transition of output video when changing video standards
- Progressive Segmented Frame (PsF) conversion
- Progressive or Interlaced Format Pass Through
- AXI-MM interface for highest quality deinterlacing
- Provides processor interfaces for EDK pCore and General Purpose Processor
 - Supports easy integration with other Xilinx Video IP Cores, including the OSD, VDMA and Video Scaler

LogiCORE IP Facts Table	
Core Specifics	
Supported Device Family ⁽¹⁾	Kintex®-7, Spartan®-6, Virtex®-6
Supported User Interfaces	AXI4, AXI4-Lite, AXI4-Stream ⁽²⁾ , General Purpose Processor (GPP)
Resources	See Table 2-1 through Table 2-3 .
Provided with Core	
Documentation	Product Specification
Design Files	NGC netlist, Encrypted HDL
Example Design	Not Provided
Test Bench	VHDL ⁽³⁾
Constraints File	Not Provided
Simulation Models	VHDL or Verilog Structural, C Model ⁽³⁾
Tested Design Tools	
Design Entry Tools	CORE Generator™ tool, Platform Studio (XPS) 14.1
Simulation ⁽⁴⁾	Mentor Graphics ModelSim, Xilinx® ISim 14.1
Synthesis Tools	Xilinx Synthesis Technology (XST) 14.1
Support	
Provided by Xilinx, Inc.	

1. For a complete listing of supported devices, see the [release notes](#) for this core.
2. Video protocol as defined in the *Video IP: AXI Feature Adoption* section of [UG761 AXI Reference Guide](#).
3. HDL test bench and C-Model available on the product page on Xilinx.com at <http://www.xilinx.com/products/ipcenter/EF-DI-DEINTERLACER.htm>.
4. For the supported versions of the tools, see the [ISE Design Suite 14: Release Notes Guide](#).

Overview

A vast majority of display technologies and video compression techniques use progressive scanning techniques for applications. These technologies require a way to convert interlaced material to progressive scanning methods. The Xilinx Video Deinterlacer core provides the mechanism for achieving this goal.

The Xilinx Video Deinterlacer converts live incoming interlaced video streams into progressive video streams. This process is performed in real time as the input video passes through the video deinterlacer.

By definition, interlaced images have temporal motion between the two fields that comprise an interlaced frame. The conversion to a progressive format recombines these two fields into one single frame. The raw recombination of interlaced video streams results in unsightly motion artifacts in the progressive output image. For this reason, the video deinterlacer uses additional motion tracking and diagonal edge enhancement techniques to ensure that these artifacts are removed where possible. This results in a high-quality progressive output image.

In addition to deinterlacing, the video deinterlacer fully supports both progressive pass through, "Progressive Segmented Frames" (PsF) and "Pull down" encoded streams.

The core supports a wide range of industry standard video encoding and packing methods, including:

- 8, 10 or 12 bits per pixel
- YUV or RGB color spaces (static or dynamically configurable)
- 4:2:0, 4:2:2 or 4:4:4 packing (static or dynamically configurable)

The video deinterlacer requires an external memory store to maintain a three field triple buffer. The core interfaces to external memory using axi-interconnect through the AXI-MM port.

The video deinterlacer supports highly scalable resolutions with a range of 128x128 up to 2048x2048, such as:

- Supported standard SD formats are 480i, 480p, 576i, 576p
- Supported standard HD formats are 720p, 1080i, 1080p
- Digital Cinema 2K

- All PC resolutions (for example, 640x480, 1024x768, 1280x1024, 1920x1200)

The core is highly configurable and can be optimized for the smallest FPGA footprint.

Figure 1-1 illustrates the internal architecture of the video deinterlacer. The video deinterlacer comprises two main video processing kernels and a memory controller interface.

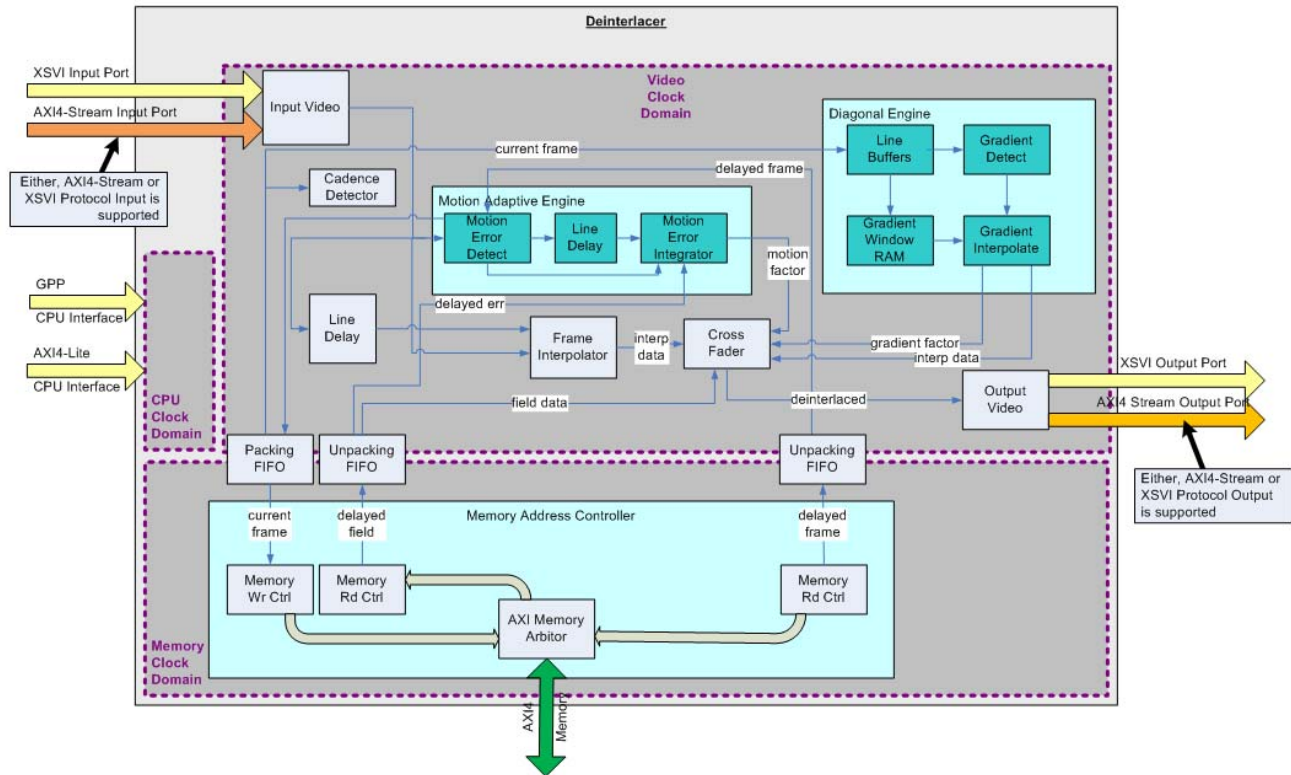


Figure 1-1: Architecture of Video Deinterlacer

The deinterlacer is a stream-based core that processes interlaced video on the fly to produce a progressive video output. In a multiple video standard environment, the deinterlacer is software programmable to process interlaced, progressive or Progressive Segmented Frame (PsF) video structures, allowing the video deinterlacer to remain in the system datapath at all times.

The deinterlacer is fully autonomous in its processing, but the deinterlacing effects of the kernels can be altered by system software on a dynamic basis.

The deinterlacing algorithm is based on a combination of motion adaptive concepts combined with diagonal interpolation techniques, resulting in a high quality deinterlaced image.

Figure 1-2 shows a traditional output from a motion adaptive deinterlacer. The staircase effect of fast moving video causes a field interpolation distortion effect on the output video.



Figure 1-2: **Classic Motion Adaptive Deinterlacing Techniques**

Using the deinterlacer core, a blend of motion and diagonal algorithms are combined to create the image in Figure 1-3. The deinterlacer's algorithms recognize motion and detect diagonal vectors. These are combined to form a cleaner pixel that is used in the output video.



Figure 1-3: **Xilinx Video Deinterlacer Deinterlacing Algorithm**

Feature Summary

Applications include:

- Conversion of interlaced SD TV to progressive SD
- Conversion of CCD image data to a progressive image
- Reconstruction of original 24P film rate from an interlaced source
- Combined with Xilinx Video Scaler, SD to HD up-conversion system

Licensing

Ordering Information

The Video Deinterlacer core is provided under the [SignOnce IP Site License](#) and can be generated using the Xilinx CORE Generator system. The CORE Generator system is shipped with Xilinx ISE Design Suite software.

A simulation evaluation license for the core is shipped with the CORE Generator system. To access the full functionality of the core, including FPGA bitstream generation, a full license must be obtained from Xilinx. For more information, visit the [Video Deinterlacer product page](#).

Contact your local Xilinx [sales representative](#) for pricing and availability of additional Xilinx LogiCORE IP modules and software. Information about additional Xilinx LogiCORE IP modules is available on the Xilinx [IP Center](#).

Licensing Options

The Xilinx video deinterlacer LogiCORE system provides three licensing options. After installing the required Xilinx ISE software and IP Service Packs, choose a license option.

Simulation Only

The Simulation Only Evaluation license key is provided with the Xilinx CORE Generator tool. This key lets you assess the core functionality with your own design and demonstrates the various interfaces on the core in simulation. (Functional simulation is supported by a dynamically-generated HDL structural model.)

Full System Hardware Evaluation

The Full System Hardware Evaluation license is available at no cost and lets you fully integrate the core into an FPGA design, place and route the design, evaluate timing, and perform back-annotated gate-level simulation of the core.

In addition, the license key lets you generate a bitstream from the placed and routed design, which can then be downloaded to a supported device and tested in hardware. The core can be tested in the target device for a limited time before timing out (ceasing to function), at which time it can be reactivated by reconfiguring the device.

Full

The Full license key is provided when you purchase the core and provides full access to all core functionality both in simulation and in hardware, including:

- Functional simulation support
- Back annotated gate-level simulation support
- Full implementation support including place and route and bitstream generation
- Full functionality in the programmed device with no time outs

Simulation License

No action is required to obtain the Simulation Only Evaluation license key; it is provided by default with the Xilinx CORE Generator software.

Product Specification

Standards Compliance

The Video Deinterlacer core is compliant with the AXI4-Stream Video Protocol and AXI4-Lite interconnect standards. Refer to the *Video IP: AXI Feature Adoption* section of the [UG761 AXI Reference Guide](#) for additional information.

Performance

Deinterlacing Quality Configurations

The deinterlacer comprises these possible quality levels of deinterlacing:

- On the fly field interpolation (lowest quality)
- On the fly field interpolation with diagonal enhancement
- Motion adaptive
- Motion adaptive and diagonal enhancement (highest quality)

The deinterlacer can either be statically configured at core generation time or dynamically configured via the AXI4-Lite interface to perform any of the previous deinterlacing techniques on input video.

Inclusion of the motion adaptive (C_MOTION=1) core requires an AXI-MM based external memory interface. The external interface is used to provide the highest possible quality of deinterlacing. Opting out of the motion adaption core (C_MOTION=0) removes the need for an external memory interface and significantly reduces the FPGA resources required. However, the trade-off is lower quality of the output image. The AXI-MM interface ports are not used in this configuration.

Inclusion of the diagonal (C_DIAG=1) core requires only standard FPGA resources (DSP and block RAM) with the benefit of increased image quality.

Latency

Latency equals the average approximate 3 video lines from first pixel entering the core to first pixel coming out of video output port.

Throughput

The deinterlacer creates 2 pixels for every input pixel. Due to this, the deinterlacer requires that the video clock be at minimum twice the video input pixel rate, to allow the internal processing enough clock cycles to generate the output pixels.

There is a 1 line push back buffer at the input of the deinterlacer, to allow for a small amount of sporadic pixel loading into the deinterlacer. But systems that may exhibit more fluctuations on input data loading should consider external line buffer blocks that are beyond the scope of the deinterlacer.

There is a 1000 pixel output push back buffer, to allow for small fluctuations in the ability for a downstream component to accept data.

If either the input or output buffers overflow, the deinterlacer will raise an interrupt and automatically flush the video pipe and attempt to resynchronise with the passing video on the next frame boundary. All input video will be dropped during this resynchronisation phase.

Resource Utilization

This section contains typical clock frequencies for the target families:

- Spartan-6: 150 MHz
- Virtex-6: 225 MHz
- Kintex 7: 260Mhz

The maximum achievable clock can vary and can depend on the size of the device, various aspects of the system design, and other variables.

Resources required for Spartan-6, Virtex-6, and Kintex 7 are shown in the following tables.

The following estimates show the range of resources for a given feature set, which span 8, 10 and 12-bit video data path options per row.

Table 2-1: Kintex-7 Resource Estimates

Feature ⁽¹⁾	Quality	Memory Interface	BRAM/ FIFO 36 bit	FF	LUT	DSP48E1
Basic Field Interpolation	Low	none	7~10	983 ~ 1144	1152 ~ 1239	6
Basic Field Interpolation with diagonal enhancement	Average	none	9~12	1810 ~ 2198	2108 ~ 2617	19
Motion based, no diagonal, 32-bit AXI-MM	High	AXI 32-bit	15~17	2847 ~ 3084	3031 ~ 3201	7
Full Motion & Diagonal, 32-Bit AXI-MM	Highest	AXI 32-bit	16~18	3821 ~ 4237	4136 ~ 4686	21
Typical High Quality Configuration (10bit, 444, 64Bit-AXI + Motion + Diagonal + Cadence)	Highest	AXI-64 bit	19	4764	4290	21
Extra Features and Incremental Resource Changes						
Add Cadence Processing ⁽²⁾		-	+1	+600	+600	+1
Decrease max video supported width between 128 ~ 1024 pixels	-	-	-1	-		
Increase AXI to 64-bit instead of 32-bit	Highest	AXI 64	+3	+40	+40	-
Increase AXI to 128-bit instead of 32-bit	Highest	AXI 128	+9	+120	+80	-
Increase AXI to 256-bit instead of 32-bit	Highest	AXI 256	+21	+240	+180	-
GPP Mode instead of AXI-Lite slave CPU Interface	-	-	-	-200	-330	-
XSVI Input Port instead of AXI4-Stream				+95	-200	
XSVI Output Port instead of AXI4-Stream				-100	-200	

1. The base feature set assumes support for video widths up to 2048 pixels wide input video standards.
2. Cadence processing can only be added to configuration that have either AXI-MM or VFBC memory interfaces.

Table 2-2: Virtex-6 Resource Estimates

Feature	Quality	Memory Interface	BRAM/ FIFO 36 bit	FF	LUT	DSP48E1
Basic Field Interpolation,	Low	none	7~10	983 ~ 1144	1232 ~ 1431	6
Basic Field Interpolation with diagonal enhancement	Average	none	9~12	1810 ~ 2198	2213 ~ 2720	19
Motion based, no diagonal, 32-bit AXI-MM	High	AXI 32-bit	15~17	2847 ~ 3084	3101 ~ 3271	7

Table 2-2: Virtex-6 Resource Estimates (Cont'd)

Feature	Quality	Memory Interface	BRAM/ FIFO 36 bit	FF	LUT	DSP48E1
Full Motion & Diagonal, 32-Bit AXI-MM	Highest	AXI 32-bit	16~18	3821 ~ 4237	4198 ~ 4731	21
Typical High Quality Configuration (10bit, 444, 64Bit-AXI + Motion + Diagonal + Cadence)	Highest	AXI-64 bit	19	4764	4345	21
Extra Features and Incremental Resource Changes						
Add Cadence Processing		-	+1	+600	+630	+1
Decrease max video supported width between 128 ~ 1024 pixels	-	-	-1	-		
Increase AXI to 64-bit instead of 32-bit	Highest	AXI 64	+3	+40	+50	-
Increase AXI to 128-bit instead of 32-bit	Highest	AXI 128	+9	+120	+100	-
Increase AXI to 256-bit instead of 32-bit	Highest	AXI 256	+21	+240	+200	-
GPP Mode instead of AXI-Lite slave CPU Interface	-	-	-	-200	-360	-
XSVI Input Port instead of AXI4-Stream				+95	-200	
XSVI Output Port instead of AXI4-Stream				-100	-200	

Table 2-3: Spartan-6 Resource Estimates

Feature	Quality	Memory Interface	BRAM 18 bit	FIFO	FF	LUT	DSP48A1
Basic Field Interpolation,	Lowest	none	11 ~ 14	-	1132 ~ 1339	1135 ~ 1248	6
Basic Field Interpolation with diagonal enhancement	Low	none	14 ~ 17	-	2112 ~ 2541	2289 ~ 2811	19
Motion based, no diagonal, 32-bit AXI-MM	High	AXI 32-bit	31 ~ 36	-	4059 ~ 4367	3966 ~ 4027	7
Full Motion & Diagonal, 32-Bit AXI-MM	Highest	AXI 32-bit	34 ~ 36	-	4901 ~ 5430	4988 ~ 5394	21
Extra Features and Incremental Resource Changes							
Add Cadence Processing		-	+1	-	+600	+630	+1
Decrease max video supported width between 128 ~ 1024 pixels	-	-	-4	-	-		
Increase AXI to 64-bit instead of 32-bit	Highest	AXI 64	+12	-	+120	+140	-

Table 2-3: Spartan-6 Resource Estimates (Cont'd)

Feature	Quality	Memory Interface	BRAM 18 bit	FIFO	FF	LUT	DSP48A1
Increase AXI to 128-bit instead of 32-bit	Highest	AXI 128	+19	-	+380	+300	-
Increase AXI to 256-bit instead of 32-bit	Highest	AXI 256	+41	-	+790	+670	-
GPP Mode instead of AXI-Lite slave CPU Interface	-	-	-	-			-

Core Interfaces and Register Space

This chapter provides detailed descriptions for each interface. In addition, detailed information about configuration and control registers is included.

Port Descriptions

Core Interfaces

Memory Mapped Interface

When configured to support motion based deinterlacing, the Video Deinterlacer requires an external memory port to perform this operation. The core can be configured to support a single bi-directional AXI4-Memory Mapped interface.

The core provides registers to allow you to specify the location in external memory of the data-buffers that are used by the motion tracking algorithm.

Processor Interface

An AXI4-Lite interface is made available for use by a system CPU or other AXI master. The processor interfaces gives full access to the Deinterlacer's internal registers and interrupt systems. The internal status of the Deinterlacer can also be monitored through this interface

General Purpose Processor Interface

When configured in General Purpose Processor mode all internal control and status signals are brought to the top level for direct connection to an external controller or tie-offs.

Video Streaming Input Interface

The core has a single video input port. The video input port is always defined to be XSVI protocol, but its width and packing modes are controlled in CoreGen.

Video Streaming Output interface

The core has a single video output port. This port can be configured to be XSVI or AXI4-Streaming Protocol.

Common I/O Signals

The EDK pCore interface and the General Purpose Processor interface share some common global signals. These are:

Table 2-4: Common Signals

Port Name	Dir	Width	Description
vid_clk	I	1	Main system video clock. Synchronous to XSVI/AXI4-Streaming in and out ports
sclr	I	1	Synchronous system reset.
m_axi_aclk	I	1	AXI master clock. The AXI MM port is synchronous to this clock
fsync_out	O	1	Frame Synchronization Pulse for down-stream devices such as AXI_VDMA
fsync_in	I	1	Frame synchronisation pulse for input video stream.

The cores video interface pins are shown below:

Table 2-5: Video Interface Pins

Port Name	Dir	Width	Description
XSVI Input Video Interface (active when C_INPUT_TYPE=0)			
ce	I	1	Main system video clock enable. Used to throttle data passing through the deinterlacer.
xsvi_video_data_in	I	[C_STREAMS*C_DEPTH-1:0]	Input video data, packed according to XSVI interface specification.
xsvi_hblank_in	I	1	Input video horizontal blanking, active high
xsvi_vblank_in	I	1	Input video vertical blanking, active high
xsvi_active_video_in	I	1	Input video active video strobe, active high
xsvi_active_chroma_in	I	1	Input video active chroma strobe, active-High. Only used if 422 or 420 packing modes are selected
xsvi_field_id_in	I	1	Input video field id flag
XSVI Output Interface (active when C_OUTPUT_TYPE = 0)			
xsvi_video_data_out	O	[C_STREAMS*C_DEPTH-1:0]	Output video data, packed according to XSVI interface specification.
xsvi_hblank_out	O	1	Output video horizontal blanking, active-High
xsvi_vblank_out	O	1	Output video vertical blanking, active-High
xsvi_active_chroma_out	O	1	Output video chroma strobe, active high. Only used if 422 or 420 packing modes are selected

Table 2-5: Video Interface Pins (Cont'd)

Port Name	Dir	Width	Description
xsvi_active_video_out	O	1	Output video active video strobe, active high
xsvi_en_out	O	1	Output video enable strobe
AXI4-Streaming Output Interface (active when C_OUTPUT_TYPE = 1)			
m_axis_tdata	I	[C_M_AXIS_TDATA_WIDTH-1:0]	Output video data, packed according to AXI4S-XSVI interface specification
m_axis_tkeep	O	[C_M_AXIS_TDATA_WIDTH/8-1:0]	Output video keep strobe
m_axis_tstrb	O	[C_M_AXIS_TDATA_WIDTH/8-1:0]	Output video data strobe
m_axis_tvalid	O	1	Output video data is valid enable
m_axis_tready	I	1	Output video data acknowledge
m_axis_tlast	O	1	Output video end of video line marker
m_axis_tuser	O	[0:0]	Output video frame sync pulse
AXI4-Streaming Input Interface (active when C_INPUT_TYPE = 1)			
s_axis_tdata	I	[C_S_AXIS_TDATA_WIDTH-1:0]	input video data, packed according to AXI4S-Streaming interface specification
s_axis_tkeep	O	[C_S_AXIS_TDATA_WIDTH/8-1:0]	input video keep strobe
s_axis_tstrb	O	[C_S_AXIS_TDATA_WIDTH/8-1:0]	input video data strobe
s_axis_tvalid	O	1	input video data is valid enable
s_axis_tready	I	1	input video data acknowledge
s_axis_tlast	O	1	input video end of video line marker
s_axis_tuser	I	[0:0]	input video frame sync pulse (valid when C_SOF_IS_AXI = 1_

External Memory Interface Signals

When Configured with a AXI-MM interface the following signals are present:

Table 2-6: AXI-MM Interface Signals

Port Name	Dir	Width	Description
AXI4-Lite Slave Interface			
m_axi_awaddr	O	[31:0]	AXI Write Address
m_axi_awid	O	[C_M_AXI_THREAD_ID_WIDTH-1]	AXI Write Thread ID
m_axi_awlen	O	[7:0]	AXI Write Burst Length
m_axi_awsz	O	[2:0]	AXI Write Beat Size
m_axi_awburst	O	[1:0]	AXI Write Burst Type
m_axi_awlock	O	1	AXI Write Transaction lock

Table 2-6: AXI-MM Interface Signals (Cont'd)

Port Name	Dir	Width	Description
m_axi_awcache	O	[3:0]	AXI Write Cache Type
m_axi_awprot	O	[2:0]	AXI Write Protection Level
m_axi_awqos	O	[3:0]	AXI Write Quality of Service
m_axi_awvalid	O	1	AXI Write Address Valid
m_axi_awready	I	1	AXI Write Address acknowledge
m_axi_wdata	O	[C_M_AXI_DATA_WIDTH-1:0]	AXI Write Data
m_axi_wstrb	O	[C_M_AXI_DATA_WIDTH/8-1:0]	AXI Write Data Strobes
m_ax_wlast	O	1	AXI Write Burst Last Beat
m_axi_wvalid	O	1	AXI Write Data Valid
m_axi_wready	I	1	AXI Write Data acknowledge
m_axi_bid	I	[C_M_AXI_THREAD_ID_WIDTH-1:0]	AXI Write Response Thread ID
m_axi_bresp	I	2	AXI Write Response
m_axi_bvalid	I	1	AXI Write Response Valid
m_axi_bready	O	1	AXI Write Response Acknowledge
m_axi_arid	O	[C_M_AXI_THREAD_ID_WIDTH-1:0]	AXI Read Thread ID
m_axi_araddr	O	[31:0]	AXI Read Address
m_axi_arlen	O	[7:0]	AXI Read Burst Length
m_axi_arsize	O	[2:0]	AXI Read Burst beat size
m_axi_arburst	O	[1:0]	AXI Read Burst type
m_axi_arlock	O	1	AXI Read Transaction Locked
m_axi_arcache	O	[3:0]	AXI Read Transaction Protection Level
m_axi_arprot	O	[2:0]	AXI Read Cache type
m_axi_arqos	O	[3:0]	AXI Read Quality of Service
m_axi_arvalid	O	1	AXI Read Address Valid
m_axi_arready	I	1	AXI Read Address acknowledge
m_axi_rid	I	[C_M_AXI_THREAD_ID_WIDTH-1:0]	AXI Read Data Thread ID
m_axi_rdata	I	[C_M_AXI_DATA_WIDTH-1:0]	AXI Read Data
m_axi_rresp	I	1	AXI Read Response
m_axi_rlast	I	1	AXI Read Data Burst Last beat strobe.
m_axi_rvalid	I	1	AXI Read Response Valid
m_axi_rready	O	1	AXI Reset Response acknowledge

Configuration Interface Signals

When configured as a general purpose processor interface control mechanism. The following pins are present:

Table 2-7: Configuration Interface Signals

Port Name	Dir	Width	Description
General Purpose Processor Interface			
gpp_update_req	I	1	Internal register update request
gpp_update_done	O	1	Internal register updates are completed
gpp_bypass	I	1	Force deinterlacer pass through
gpp_fs_base_0	I	[31:0]	Base address of Page 0 Field Buffer
gpp_fs_base_1	I	[31:0]	Base address of Page 1 Field Buffer
gpp_fs_base_2	I	[31:0]	Base address of Page 2 Field Buffer
gpp_fs_words	I	[23:0]	Size in 32 bit words of Field Page size
gpp_deint_pack	I	[1:0]	Video Packing format 0 : 4:2:0 Packing 1 : 4:2:2 Packing 2 : 4:4:4 Packing 3 : Reserved
gpp_deint_debug	I	[7:0]	colourisation of output video
gpp_deint_mode	I	[2:0]	deinterlacing algorithm mode 0 = Field interpolation 1 = Motion Adaptive 2 = Diagonal Compensating 3 = Motion & Diagonal Compensating 4 = Line duplication
gpp_deint_thresh_t1	I	[9:0]	Motion adaptive threshold T1
gpp_deint_thresh_t2	I	[9:0]	Motion adaptive threshold T2
gpp_deint_xfade_scale	I	[15:0]	Cross Fade Ratio
gpp_deint_xsize	I	[10:0]	Horizontal frame size
gpp_deint_ysize	I	[10:0]	Vertical input frame size
gpp_deint_col	I	1	Colourspace 0 = YUV 1 = RGB
gpp_deint_black	I	[C_DEPTH*3-1:0]	Definition of black for the active colourspace
gpp_deint_pull_en_22	I	1	pulldown 2:2 controller enable
gpp_deint_pull_en_32	I	1	pulldown 3:2 controller enable
gpp_deint_order	I	1	First Field is odd/even 0 = even (PAL/HD) 1 = odd (NTSC)
gpp_version	O	[31:0]	hardware version id major.minor.rev
gpp_irq_req	O	[15:0]	interrupt request lines

Table 2-7: Configuration Interface Signals (Cont'd)

Port Name	Dir	Width	Description
gpp_video_accept	I	1	Accept video on input port. Change on next frame boundary. 0 = ignore all video 1 = accept video
gpp_deint_pull_22_fld	I	1	Select field precedence for 2:2 pulldown detection. 0 = normal mode 1 = inverted mode

When configured as an EDK pCore the following AXI4-Lite interface is present:

Table 2-8: AXI4-Lite Interfaces

Port Name	Dir	Width	Description
AXI4-Lite Slave Interface			
s_axi_aclk	I	1	CPU clock. The AXI slave interface is synchronous to this clock
s_axi_awaddr	I	[31:0]	AXI Write Address
s_axi_awvalid	I	1	AXI Write Address Valid
s_axi_awready	O	1	AXI Write Address acknowledge
s_axi_wdata	I	[31:0]	AXI Write Data
s_axi_wvalid	I	1	AXI Write Data Valid
s_axi_wready	O	1	AXI Write Data acknowledge
s_axi_bresp	O	2	AXI Write Response
s_axi_bvalid	O	1	AXI Write Response Valid
s_axi_bready	I	1	AXI Write Response Acknowledge
s_axi_araddr	I	[31:0]	AXI Read Address
s_axi_arvalid	I	1	AXI Read Address Valid
s_axi_arready	O	1	AXI Read Address acknowledge
s_axi_rdata	O	[31:0]	AXI Read Data
s_axi_rresp	O	1	AXI Read Response
s_axi_rvalid	O	1	AXI Read Response Valid
s_axi_rready	I	1	AXI Reset Response acknowledge
ip2intc_irpt	O	1	CPU interrupt request. Active High Level interrupt synchronous to s_axi_aclk

Register Space

This section provides the programming interface register information.

All registers power up with 0x0. Only the control, mode and interrupt control registers are reset to 0x0 during a software reset, all other registers retain their current settings.

Table 2-9: Register Map

Address	Name	Read/Write	Description
0x0000	control	R/W	General Control register
0x0004	mode	R/W	Deinterlacer modes
0x0008	interrupt control	R/W	Interrupt enable and disable register
0x000C	interrupt status	R/W1C	Interrupt status and clear register
0x0010	height	R/W	Input frame height
0x0014	width	R/W	Input frame width
0x0018	threshold T1	R/W	Motion adaptive threshold T1
0x001C	threshold T2	R/W	Motion adaptive threshold T2
0x0020	cross fade scale	R/W	Cross fade scaling
0x0024	buffer 0 base	R/W	External triple buffer 0 base address
0x0028	buffer 1 base	R/W	External triple buffer 1 base address
0x002C	buffer 2 base	R/W	External triple buffer 2 base address
0x0030	buffer size	R/W	External triple buffer segment size
0x0038	pull-down high	R/W	Pull-down High Register
0x00F0	version	R	Hardware version id
0x0100	soft reset	R/W	Internal soft reset

Table 2-10: Control Register

0x0000																Control																R/W					
3	3	2	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	a	b	u			
Reserved																																					
Name		Bits		Description																																	
Reserved		31:3		Reserved																																	
Deinterlacer Accept Video		2		Instructs the video whether to accept or ignore all video at the input to the deinterlacer. This bit takes affect on the next input video frame boundary.																																	
Deinterlacer Enable		1		While the deinterlacer is disable, active video passes through the deinterlacer in its original form. Note: All Blanking information is always stripped by the deinterlacer.																																	
Update Request		0		Setting this bit to '1' arms the deinterlacer to perform a register shadow update on the next frame boundary. Setting this bit to '0' cancels any pending shadow request.																																	

Table 2-11: Mode Register

0x0004										Mode														R/W									
3	3	2	2	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	0	08	07	0	0	0	0	0	0	0	0
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9			6	5	4	3	2	1	0		
Reserved														d	m	Reserved				p	2:2	3:2	s	o	pack	c	de						
Name		Bits		Description																													
Reserved		31:18		Reserved																													
Colorize Diagonal		17		Enable colorizing output image with diagonal algorithm output																													
Colorize Motion		16		Enable colorizing output image with motion algorithm output																													
Reserved		15:10		Reserved																													
Pull-down 2:2 Field Precedence		9		Select which field precedence is used to detect 2:2 formats. when set '1' normal mode is used, when set '0' inverted mode is used																													
Pull-down Enable 2:2		8		Allow Pull-down detector to automatically control deinterlacer																													
Pull-down Enable 3:2		7		Allow Pull-down detector to automatically control deinterlacer																													
PsF Enable		6		Progressive Segmented Frame Enable (PsF mode)																													
Field Order		5		Sets the first field order for input video When set '1' the field order maps to NTSC / 480i When set '0' the field order maps to PAL / HD / 3G																													
Packing Format		4:3		Sets the XSVI packing formats used on the input and output When set to 0: 4:2:0 packing is used When set to 1: 4:2:2 packing is used When set to 2: 4:4:4 packing is used																													
Color Space		2		Colorspace of video When set to '0' YUV colorspace is used When set to '1' RGB colorspace is used																													
Deinterlacing Algorithm		1:0		Sets the deinterlacing method used When set to '0' pure field interpolating techniques are used When set to '1' only motion adaptive engine is used When set to '2' only the diagonal engine is used When set to '3' both motion and diagonal engines are used																													

Table 2-12: Interrupt Control Register

0x0008										Interrupt Control														R/W								
3	3	2	2	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	
Reserved																																
Name		Bits		Description																												
Reserved		31:12		Reserved																												
Framestore Rd Err 1		11		Enable Error detection on AXI-MM Port																												
Framestore Rd Err 0		10		Enable Error detection on AXI-MM Port																												
Framestore Wr Err		9		Enable Error detection on AXI-MM Port																												

Table 2-12: Interrupt Control Register

Framestore Wr Marker	8	Enable Framestore integrity checking
Reserved	7	Reserved
Frame Interrupt	6	Enables the video frame border interrupt when set to '1'
Pull-down off	5	Enable pull-down loss detection
Pull-down on	4	Enable pull-down activation detection
Deinterlacer Error	3	Enable internal diagnostic error interrupt
Synch off	2	Enable loss of video lock detector
Synch on	1	Enable lock of input video detector
Update Interrupt	0	Enables the register shadow update done interrupt when set to '1'

Table 2-13: Interrupt Status Register

0x000C								Interrupt																R/W1C									
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0		
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0		
Reserved																																	
Name		Bits		Description																													
Reserved		31:12		Reserved																													
Framestore Rd Err 1		11		The AXI-MM Port is experiencing FIFO under run																													
Framestore Rd Err 0		10		The AXI-MM Port is experiencing FIFO Under run																													
Framestore Wr Err		9		The AXI-MM Port is experiencing FIFO Overrun																													
Framestore Wr Marker		8		The framestore is experiencing video data frames that do not match the programmed settings																													
Reserved		7		Reserved																													
Frame Interrupt		6		A Video frame boundary has passed.																													
Pull-down off		5		Pull-down detector has seen pull down sequence disappear.																													
Pull-down on		4		Pull-down detector has found a pull down sequence.																													
Deinterlacer Error		3		Internal deinterlacer FIFO overrun error.																													
Synch off		2		Deinterlacer has lost synchronization to input video																													
Synch on		1		Deinterlacer is synchronized to input video																													
Update Interrupt		0		A internal register update has occurred																													

Table 2-14: Height Register

0x0010								Height																R/W							
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0
Reserved																Height															
Name		Bits		Description																											

Table 2-14: Height Register

Reserved	31:11	Reserved
Height	10:0	Input pixel height of video frame

Table 2-15: Width Register

0x0014								Width																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
Reserved																Width																			
Name		Bits		Description																															
Reserved		31:11		Reserved																															
Width		10:0		Input pixel width of video frame																															

Table 2-16: Threshold T1 Register

0x0018								Threshold T1																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0		
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
Reserved																T1																			
Name		Bits		Description																															
Reserved		31:10		Reserved																															
T1 setting		9:0		Motion Adaptive T1 threshold value																															

Table 2-17: Threshold T2 Register

0x001C								Threshold T2																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0		
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
Reserved																T2																			
Name		Bits		Description																															
Reserved		31:3		Reserved																															
T2 setting		0		Motion Adaptive T2 threshold value																															

Table 2-18: Cross Fade Scale Register

0x0020								Cross Fade Scale																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0		
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
Reserved																xfade																			
Name		Bits		Description																															
Reserved		31:16		Reserved																															
Cross Fade Scale		15:0		Motion Adaptive cross fade scaling factor. MUST be programmed using this equation: $scale = (4096 * 256) / (register\ T2 - register\ T1)$																															

Table 2-19: Buffer 0 Register

0x0024								Buffer 0																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
R								Base																											
Name								Bits				Description																							
Buffer 0 Base								31:0				Base address in external memory of the first field buffer																							

Table 2-20: Buffer 1 Register

0x0028								Buffer 1																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
R								Base																											
Name								Bits				Description																							
Buffer 1 Base								31:0				Base address in external memory of the second field buffer																							

Table 2-21: Buffer 2 Register

0x002C								Buffer 2																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
R								Base																											
Name								Bits				Description																							
Buffer 2 Base								31:0				Base address in external memory of the third field buffer																							

Table 2-22: Pull-down High Threshold

0x0038								Pull-down High Threshold																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
Reserved								size																											
Name								Bits				Description																							
Reserved								31:24				Reserved																							
Pull-down high								23:0				Motion threshold for pull-down high detection																							

Table 2-23: Version ID Register

0x00F0								Version ID																R/W											
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	0	0	0	0
								Reserved																											
Name								Bits				Description																							
Major Version								31:28				Major version as a single 4-bit hexadecimal value.																							

Table 2-23: Version ID Register

Minor Version	27:20	Minor version as two separate 4-bit hexadecimal values (00 - FF).
Revision Letter	19:16	Revision letter as a hexadecimal character from 'a' - 'f'; mapping is: 0xA->'a', 0xB->'b', 0xC->'c', 0xD->'d', and so on.
Patch Revision	15:12	Core Generator Patch Revision.
Reserved	11:0	Reserved

Table 2-24: Soft Reset Register

0x0100								Soft Reset																R/W															
3	3	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	3	2	1	0				
Reserved																												R											
Name								Bits		Description																													
Reserved								31:24		Reserved																													
Soft Reset								0		Writing a '1' to this register will initiate a soft reset. This resets the internal deinterlacer to its default state, and purges all video currently inside the deinterlacer. This bit will self clear to zero once the soft reset has completed.																													

Customizing and Generating the Core

This chapter includes information on using Xilinx tools to customize and generate the core.

Control Values

In both GPP and pcore modes, the control values are provided dynamically at the input of the deinterlacer and can be changed during run time.

For the pcore version of the core, CORE Generator software provides the GPP core placed in a wrapper, which allows you to parameterize the deinterlacer core in EDK. The ports are driven by registers on a AXI4-Lite bus. The address is decoded in the wrapper. A MicroBlaze™ processor software driver is provided in source code form to drive these ports.

The parameters that can be set dynamically via AXI4-Lite registers are:

- packing: controls the YUV packing mode used; 4:2:2, 4:2:0 or 4:4:4
- kernel mode: controls what deinterlacer algorithms are used
- threshold T1: controls the low motion threshold
- threshold T2: controls the high motion threshold
- cross fade ratio: controls the scaling factor used by the cross fader
- xsize, ysize: controls the active window size of the output video frame
- field order: sets the field order as: HD,PAL or NTSC
- color: selects which color space is processed, YUV or RGB
- black: sets the pixel value for black inside the core, dependent on color space setting
- fswords: set the amount of 32-bit words that are required to store one field of video in the external memory buffer
- fsbase0,1,2: sets the 31-bit base addresses of the three external field buffers
- PsF mode: controls if the deinterlacer is processing interlaced, PsF or progressive image structures
- pull-down mode: controls if the pull-down controller is activated

CORE Generator Tool Graphical User Interface (GUI)

The CORE Generator tool GUI is shown in [Figure 3-1](#). Field descriptions are provided in [Parameter Values in the XCO File](#). Each field sets a parameter used at build time to configure different hardware options.

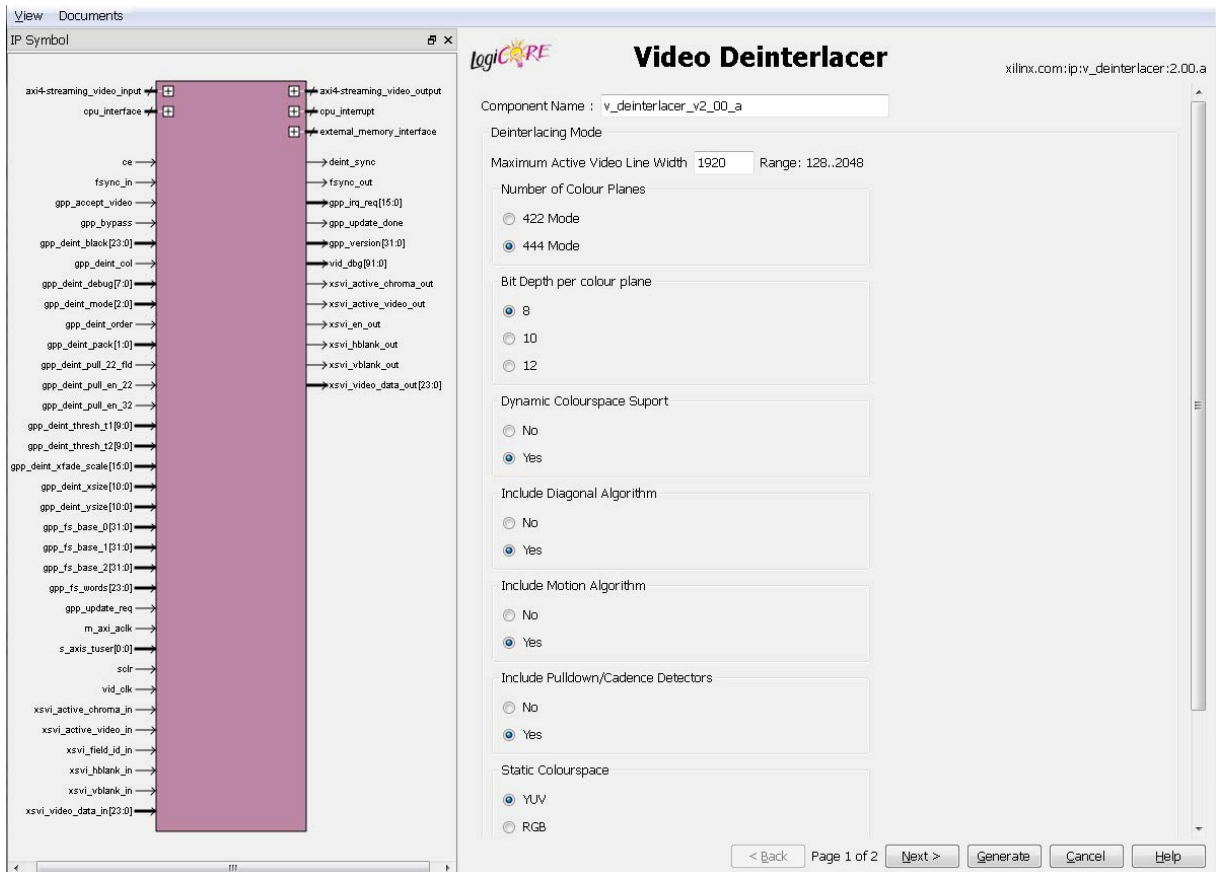


Figure 3-1: CORE Generator GUI

EDK pCore GUI

When the deinterlacer core is generated from CORE Generator as an EDK pCore it is generated with each option set to the default value. All customizations of a video deinterlacer pCore are done with the EDK pCore GUI. [Figure 3-2](#) illustrates the EDK pCore GUI for the video deinterlacer. The options in the EDK pCore GUI for the video deinterlacer correspond to the same options in the CORE Generator GUI for the video deinterlacer.

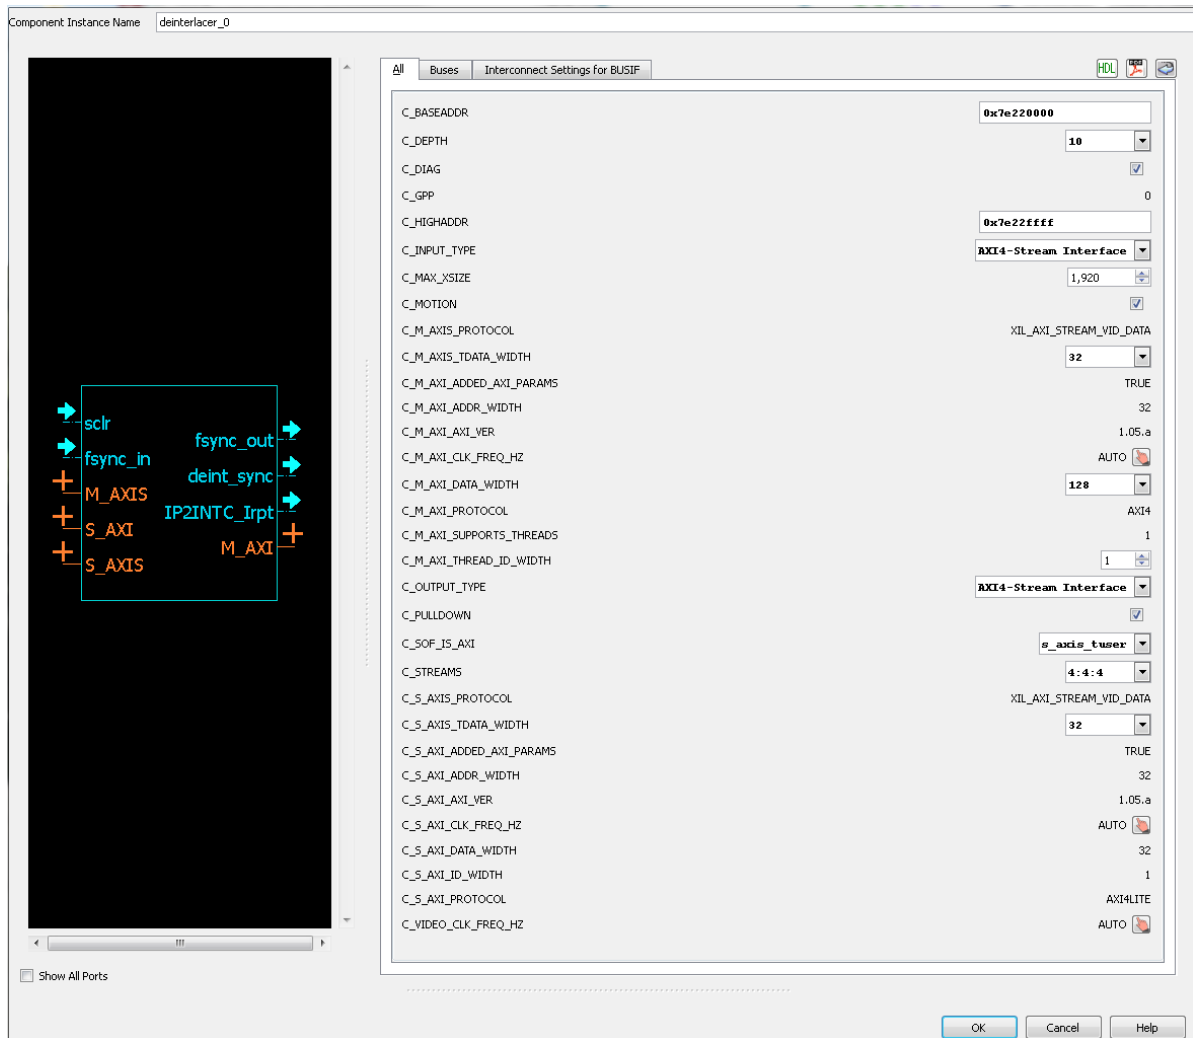


Figure 3-2: Video Deinterlacer Configuration Screen

The following table provide the design parameters, allowable values, and descriptions for the video deinterlacer system. Parameter values that are strings or that contain alpha numeric characters must be uppercase.

Table 3-1: System Parameters

Parameter Name	Default Value	Allowable Values	Description
C_BASEADDR	0x10000000	Valid Address	System base address
C_HIGHADDR	0x10000FFF	Valid Address	System high address
C_FAMILY	Virtex6	Virtex-6, Spartan-6, Kintex 7	Target FPGA family
C_MAX_XSIZE	720	128-2048	Maximum raster width supported
C_GPP	0	0,1	Selects between AXI4-Lite or GPP configuration interfaces
C_STREAMS	3	2,3	Number of simultaneous color planes

Table 3-1: System Parameters (Cont'd)

C_DEPTH	8	8,10,12	Bit depth of a pixel
C_DYN	1	0,1	Dynamic colorspace enabling 0=Static Color Space 1=Dynamic Color Space
C_PULLDOWN	1	0,1	Cadence/Pull-down detection 0=No pull-down detection 1=Full pull-down detection
C_COL	1	0,1	Static color space setting 0=YUV 1= RGB
C_DIAG	1	0,1	Statically include the diagonal kernel
C_MOTION	1	0,1	Statically include the motion kernel
C_INPUT_TYPE	1	0,1	Input video interface type: 0 = XSVI 1 = AXI4-Streaming
C_SOF_IS_AXI	1	0,1	Input frame synchronisation source: 0 = use fsync_in pin as frame start pulse 1 = use s_axis_tuser[0] as frame start
C_OUTPUT_TYPE	1	0,1	Output video interface type 0=XSVI 1=AXI4-Streaming
C_MAXIS_TDATA_WIDTH	16	16, 24, 32, 40, 48	Output AXI Streaming data width
C_S_AXIS_TDATA_WIDTH	16	16,24,32,40,48,64	Input AXI Streaming data width
C_AXI_DATA_WIDTH	64	32, 64, 128, 256	AXI-MM Data Width
C_AXI_THREAD_ID_WIDTH	1	0,1	AXI-MM Thread ID Width

Video Deinterlacer Core Interfaces

There are many video systems that use an integrated MicroBlaze™ processor soft core to dynamically control the parameters within the system. This is especially important when several independent image processing cores are integrated into a single FPGA. The video deinterlacer core can be configured with one of two interfaces: an EDK pCore Interface or a General Purpose Processor Interface.

EDK pCore Interface

The pCore interface creates a core that can be added to an EDK project as a hardware peripheral. This section describes the register set, the pCore driver files, and the I/O signals associated with the video deinterlacer core.

After it is generated by CORE Generate software, the new video deinterlacer pCore is located in the CORE Generator project directory at:

Component_Name/pcores/v_deinterlacer_v2_00_a

The pCore should be copied to the user's *EDK_Project/pcores* directory or to a user pCores repository. The video deinterlacer pCore driver software is located in the CORE Generator project directory at:

Component_Name/drivers/v_deinterlacer_v2_00_a

The driver software should be copied to the *EDK_Project/drivers* directory or to a user pCores repository.

pCore Register Set

The pCore interface provides a memory mapped interface for the programmable registers within the core, which are defined in [Register Space](#).

pCore Driver Files

The video deinterlacer pCore includes a C language software driver that the user can use to control the video deinterlacer. A high-level API is provided to hide the details of the video deinterlacer, and application developers are encouraged to use it to access the device features. A low-level API is also provided if developers prefer to access the devices directly through the system registers described in the previous section.

[Table 3-2](#) lists the files that are included with the video deinterlacer pCore driver.

Table 3-2: Software Driver Files Provided With the Video Deinterlacer pCore

File Name	Description
xdeint.h	Contains all prototypes of high-level API to access all of the features of the video deinterlacer device.
xdeint.c	Contains the implementation of high-level API to access all of the features of the video deinterlacer device
xdeint_intr.c	Contains the implementation of high-level API to access the interrupt feature of the video deinterlacer device.
xdeint_sinit.c	Contains static initialization methods for the video deinterlacer device.
xdeint_g.c	Contains a template for a configuration table of video deinterlacer devices. This file is used by the high-level API and is automatically generated to match the video deinterlacer device configuration by EDK/SDK tools when the software project is built.
xdeint_hw.h	Contains low-level API (that is, identifiers and register-level driver API) that can be used to access the video deinterlacer device.

Table 3-2: Software Driver Files Provided With the Video Deinterlacer pCore

xdeint_i.h	Contains internal functions of the video deinterlacer device driver. The application should never need to invoke any function/macro in this file
example.c	An example that demonstrates how to configure the video deinterlacer device using the high-level API.

Parameter Values in the XCO File

Table 3-3 defines valid entries for the Xilinx CORE Generator (XCO) parameters. Xilinx strongly suggests that XCO parameters are not manually edited in the XCO file; instead, use the CORE Generator software GUI to configure the core and perform range and parameter value checking. The XCO parameters are helpful in defining the interface to other Xilinx tools.

Table 3-3: XCO Parameters

XCO Parameter	Default	Valid Values
component_name	v_deinterlacer_v2_00_a_u0	ASCII text using characters: a..z, 0..9 and "_" starting with a letter. Note: "v_deinterlacer_v2_00_a" is not allowed.
c_col	0	0,1
c_depth	8	8,10,12
c_diag	1	0,1
c_dyn	1	0,1
c_pulldown	1	0,1
c_motion	1	0,1
c_input_type	1	0,1
c_sof_is_axi	1	0,1
c_output_type	1	0,1
c_max_size	1920	128-2048
c_streams	3	2,3
c_m_axi_clk_freq_hz	200000000	Positive Integer
c_m_axi_data_width	128	32,64,128,256
c_m_axi_thread_id_width	2	1-4
c_m_axis_tdata_width	24	16,24,32,40,64
c_s_axis_tdata_width	16,24,32,40,48,64	Input AXI Streaming data width
c_s_axi_clk_freq_hz	50000000	Positive Integer
c_simulation	1	0,1

Table 3-3: XCO Parameters (Cont'd)

XCO Parameter	Default	Valid Values
c_gpp	0	0,1
c_baseaddr	0x10000000	ASCII text of 32bit hexadecimal value.
c_highaddr	0x100000FF	ASCII text of 32bit hexadecimal value.

Output Generation

The output files generated from the Xilinx CORE Generator software for the Video Deinterlacer core generates CORE Generator specific files. The output files are placed in the project directory.

pCore Files

File Details

- <project directory>
This is the top-level directory. It contains xco and other assorted files.

Name	Description
<component_name>.xco	Log file from CORE Generator software describing which options were used to generate the core. An XCO file can also be used as an input to the CORE Generator software.
<component_name>_flist.txt	A text file listing all of the output files produced when the customized core was generated in the CORE Generator software.

- <project directory>/<component_name>/edk/pcores/v_deinterlacer_v2_00_a/data
This directory contains files that EDK uses to define the interface to the pCore.
- < project directory>/<component_name>/edk/pcores/v_deinterlacer_v2_00_a/hdl/vhdl
This directory contains the Hardware Description Language (HDL) files that implement the pCore.
- < project directory>/<component_name>/edk/drivers/deinterlacer_v2_00_a /data
This directory contains files that Software Development Kit (SDK) uses to define the operation of the pCore's software driver.
- < project directory>/<component_name>/edk/drivers/ deinterlacer_v2_00_a /src
This directory contains the source code of the pCore's software driver.

Name	Description
xdeint.c	Provides the Application Program Interface (API) access to all features of the Video Deinterlacer device driver.
xdeint.h	Provides the API access to all features of the Video Deinterlacer device driver.
xdeint_g.c	Contains a template for a configuration table of Video Deinterlacer core.
xdeint_hw.h	Contains identifiers and register-level driver functions (or macros) that can be used to access the Video Deinterlacer core.
xdeint_intr.c	Contains interrupt-related functions of the Video Deinterlacer device driver.
xdeint_sinit.c	Contains static initialization methods for the Video Deinterlacer device driver.

General Purpose Processor Files

When the interface selection is set to General Purpose Processor, CORE Generator then outputs the core as a netlist that can be inserted into a processor interface wrapper or instantiated directly in an HDL design. The output is placed in the <project directory>.

File Details

The CORE Generator software output consists of some or all the following files.

Name	Description
<component_name>_readme.txt	Readme file for the core.
<component_name>.ngc	The netlist for the core.
<component_name>.veo <component_name>.vho	The HDL template for instantiating the core.
<component_name>.v <component_name>.vhd	The structural simulation model for the core. It is used for functionally simulating the core.
<component_name>_synth.v <component_name>_synth.vhd	Synthesis instantiation wrapper file.
<component_name>.xco	Log file from CORE Generator software describing which options were used to generate the core. An XCO file can also be used as an input to the CORE Generator software.
<component_name>_flist.txt	A text file listing all of the output files produced when the customized core was generated in the CORE Generator software.
<component_name>.asy	IP symbol file
<component_name>.gise	ISE® software subproject files for use when including the core in ISE software designs.
<component_name>.xise	

Designing with the Core


This chapter includes guidelines and additional information to make designing with the core easier.

Deinterlacing

The deinterlacer contains two processing kernels: the motion adaptive and the diagonal detection and adaptation processing kernels. These kernels work together to form each deinterlaced pixel.

The motion adaptive kernel has two threshold parameters that can be adjusted by the user if required. These two parameters are T1 and T2. They are used as threshold points for measuring between no motion, average motion, and excessive motion. In each of these categories, the deinterlacer generates the output pixels using different techniques. [Figure 4-1](#) shows the conceptual relationship of the T1 and T2 parameters to the

deinterlacer pixel creator.

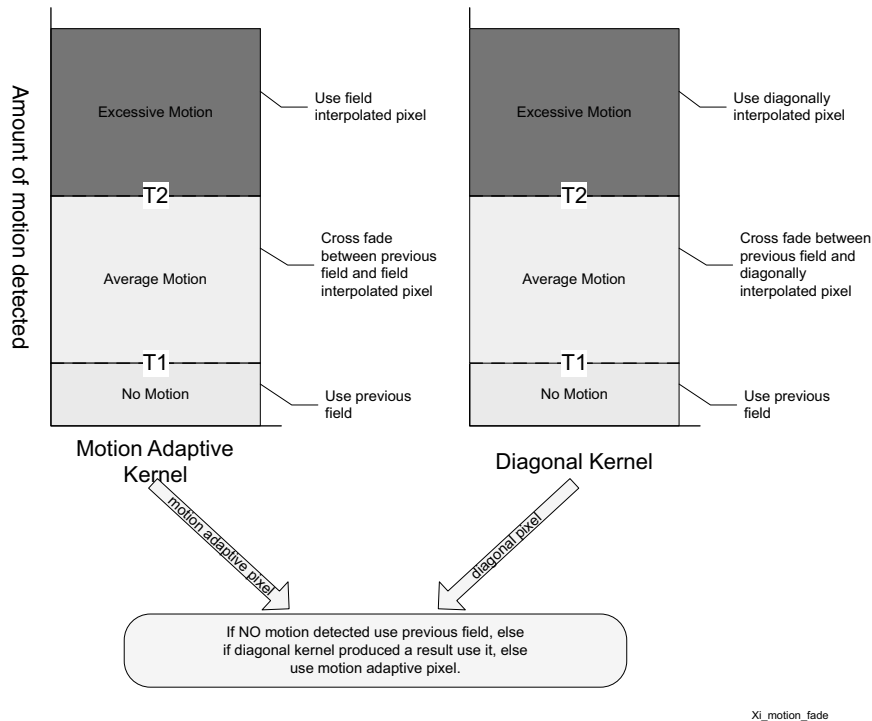

Xi_motion_fade

Figure 4-1: Output Pixel Decision Criteria

T1 and T2

T1 and T2 can be set to these default values:

Typical SDI YUV defaults: T1 = 10, T2 = 70

Typical SDI RGB defaults: T1 = 100, T2 = 200

Generally, they should not be altered, but users can alter them depending on the noise level of the input video signal. If the input video source is noisy, this may be detected as excessive motion and the output image may be of lower quality. In this case, the motion detection threshold can be increased by the application software. In this case, the motion detection threshold can be increased by application software.

Cross Fade Ratio

The cross fade scale register is derived directly from T1 and T2 according to this fixed equation:

$$\text{xfade ratio} = (4096 * 256) / (T2 - T1)$$

This value is used internally to control cross fading between kernel pixels and the frame store pixels. This register must be changed whenever T1 or T2 are altered to ensure the correct operation of the cross fader.

Initial State

The deinterlacer kernel must have two fields of video history to produce its desired output. During a video input standard change, start-up condition, change of format or error state, there is no video history for the deinterlacer to use. For these frames (if enabled via software), the deinterlacer produces progressive video outputs without the aid of the motion adaptive kernel. As a result, these initial frames appear softer in format until the memory interface has obtained sufficient history for producing the required output quality.

Figure 4-2 illustrates the sequencing of the deinterlacer output with respect to input variance. The diagram shows the two initial frames (1 and 2) being created from raw passing video and then the remainder being produced with the aid of the historical data.

The second image shows a normally operating deinterlacer that is suddenly subjected to a change in input video. The deinterlacer then resets the memory interface and reverts to a lower quality, while it builds up new picture history over the first two frames. It then reverts to fully operational state.

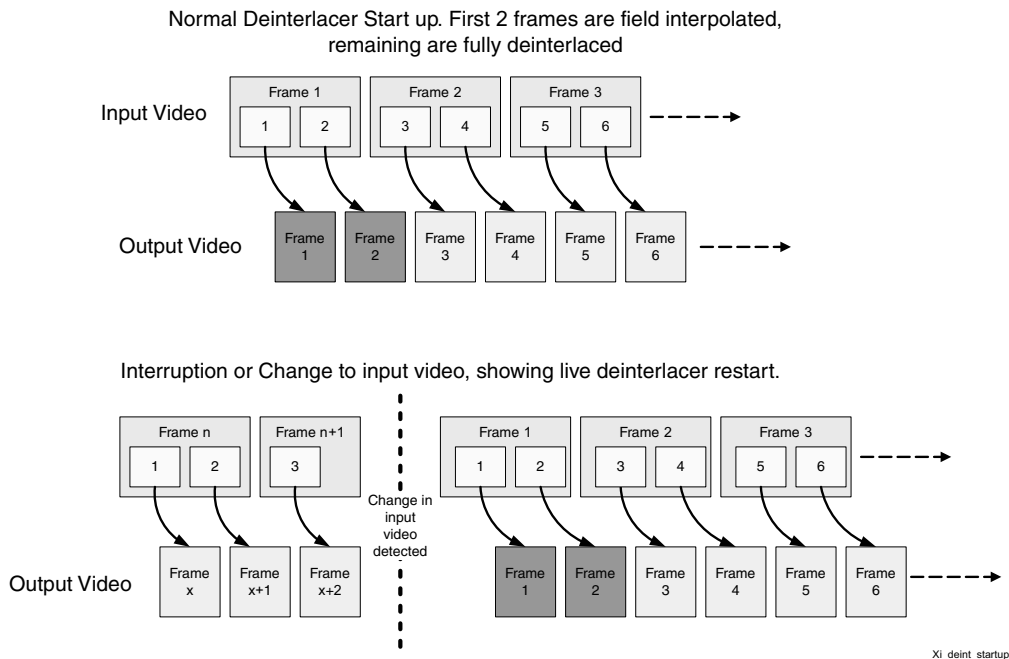


Figure 4-2: Examples of Deinterlacer Start-up Conditions

Architecture

The Xilinx Video Deinterlacer converts a live input video stream into a progressive video structure. [Figure 1-1](#) illustrates a high-level view of the ports of the deinterlacer.

In conjunction with the video path, the AXI4-MM ports read and write passing video fields to and from a memory buffer. These fields of information are used by the deinterlacer internal processing blocks to produce the final progressive video output.

In creating progressive pictures, the output frame rate of the deinterlacer is always twice the input rate and produces one pixel per clock. The video clock used must meet this system requirement. The input pixel rate must be less than or equal to the video clock rate divided by two. The output pixel rate is always twice the input pixel rate. A single common video clock is used for the entire video path.

The video deinterlacer input can be either from live video or a stored video feed. The Xilinx Streaming Video Interface (XSVI) input bus is clock enabled to allow for continuous or burst input rates. An optional full flag allows for push back of input data when the deinterlacer is receiving input from a non-live video feed. The XSVI output bus is also clock enabled and produces output pixels whenever there is a pixel inside the deinterlacer to be generated. The video deinterlacer has only minimal buffering inside. It is important to not overflow the input FIFO.

Memory Controller

The deinterlacing process requires two previous fields of video information to determine the amount of per-pixel motion present in the passing video. It then selects the most appropriate method of deinterlacing each pixel using these streams.

An external memory store is used in a triple buffer concept to store and extract passing video fields and associating sideband data. At the end of each output frame, the memory controller moves its base pointers to the next buffer and starts again. [Figure 4-3](#) illustrates

the triple buffer movement:

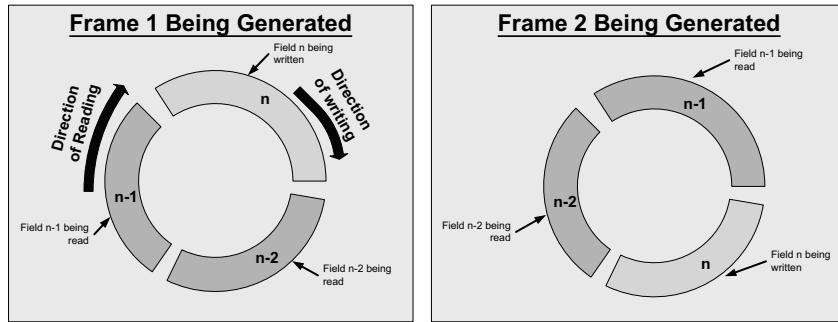


Figure 4-3: Triple Buffer Usage

The memory ports operate in a unidirectional manner, 1 write and 2 read. It continuously stores the incoming field with its motion vector and extracts fields n-1 and field n-2 from the other two buffers.

To provide efficient memory utilization, the pixel stream and error stream are tightly packed into the AXI4-MM data streams. Depending on the configured bit depth, there are three different packing formats. The stored video image should not be used by other modules. This information is an internal memory pool, although it can be monitored if needed.

Figure 4-4 illustrates the memory packing algorithm. Fields marked "pix" indicate 444 pixels and fields marked "err" are the associated motion error vector.

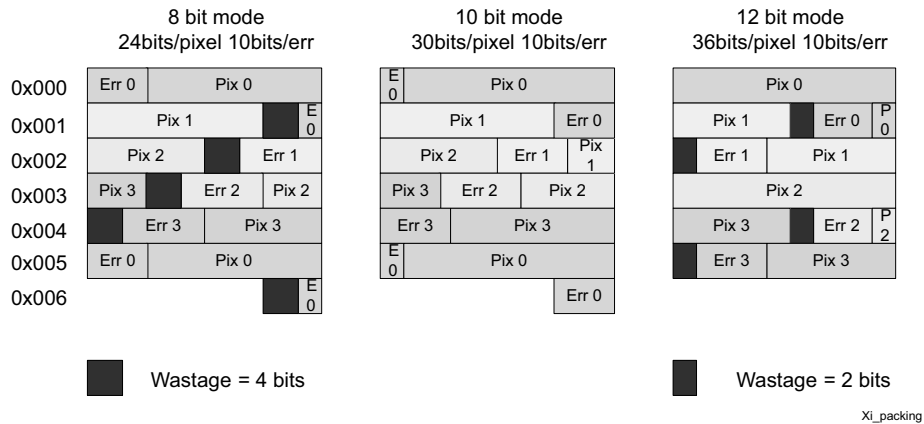


Figure 4-4: AXI4-MM Data Packing Format

Memory Size

When calculating memory requirements for the deinterlacer, the packing method and input video field size must be considered. For 8 and 10-bit color depth, the ratio is (5/4) because

five words are required to store four pixel/error pairs. For 12-bit color depth, the ratio is (3/2) because three words are required to store two pixel/error pairs. For example:

8-bit image with 720 wide requires : $720 * (5/4)$ dwords = "900" per line

12-bit image with 1920 wide requires: $1920 * (3/2)$ dwords = "2880" per line

Consequently, for a full 12-bit image that is 1920 wide and 540 lines per field, a buffer of $2880 * 540 = 1.55$ Mwords = 6.22 Mbytes is required. The total for the triple store is 18.7 Mbytes of storage.

Note: The ratios of 5/4 and 3/2 impose a line width limitation on the deinterlacer. The number of dwords per line must result in an integer value. For example, this would not be allowed: 719 8-bit pixels = $719 * (5/4) = 898.75$.

Consequently, for 8 or 10-bit images, the xsize parameter must be divisible by 4, and for 12-bit images, the xsize parameter must be divisible by 2.

I/O Interface and Timing

AXI4-Lite and GPP Interface

When selected via CORE Generator, an AXI4-Lite interface is included in the IP module. This interface is used to configure the deinterlacer dynamically during run time. While the interface operates in its own clock domain, the transfer of register information into the deinterlacer and memory controller is done synchronously. All registers are shadowed in their respective domains.

There are three categories of registers inside the core:

- Global Registers

Located in the AXI4-Lite clock domain and used internally by the deinterlacer for core wide operations, including forcing modes and completely disabling the deinterlacer.

- Deinterlacer Configuration Registers

Used to specify most of the aspects in deinterlacing, including algorithm selection, threshold control, raster size, color space and so on.

- Memory Controller Configuration Registers

Used to set up the triple field buffer memory regions that are required by the deinterlacer core.

Dynamic Reconfiguration

When working with multiple input standard streams that can change from frame to frame, the deinterlacer can transition smoothly from one format to the next without producing any unnecessary data at its output. This is achieved through the AXI4-Lite interface scheduler.

When system software programs the AXI4-Lite registers, only registers within the AXI4-Lite domain are affected. These registers can be freely written to or read from. After the software has committed to a new configuration, it writes to the global register and asserts an update request.

After this request is queued, all of the deinterlacer registers become read-only (apart from the global register). Upon the next frame boundary, the deinterlacer shadows all registers and begins processing using the new settings. This synchronous transfer ensures a clean transition from one format to the next.

If the software decides to stop the update request, it can cancel it using the global register. This operation occurs immediately as a force operation and should generally not be used under normal operating conditions. The disabling can occur coincident with the actual internal update and can cause the deinterlacer to generate unnecessary output.

Interrupts

The deinterlacer core provides eleven interrupt events to ensure efficient use of the system AXI4-Lite when using a deinterlacer. All interrupts have their own status register and can be independently enabled, disabled, and cleared. Under normal operating conditions, the deinterlacer does not require AXI4-Lite interaction. However, interrupts can be used to aid in monitoring the system state.

These interrupts are:

- Internal register update has occurred
Used to acknowledge the register update request event.
- Deinterlacer synchronized
Indicates input video raster is stable and matches programmed x/y sizes known to deinterlacer.
- Deinterlacer has lost synchronization
Indicates different input video raster to programmed x/y/ sizes, or input is not stable.
- Deinterlacer internal FIFO over run error
Occurs if video clock is not fast enough to process input video.
- Pull down controller is activating

Indicates that a pull-down cadence is detected and output video is now derived by the cadence.

- Pull down controller is deactivating

Indicates that the pull-down controller has detected the disappearance of the cadence, and the deinterlacer is reverting to normal mode.

AXI4-Lite Timing

The AXI4-Lite interface is used for programming the video deinterlacer operational modes and interrupt system. Read or write accesses to the AXI4-Lite port are considered low bandwidth and as such the slave port only processes one AXI4-Lite access at a time. If the deinterlacer is presented with a simultaneous read and write operation, the write operation takes precedence and the read operation stalls. Once the write operation is complete, the read operation completes.

Figure 4-5 shows several write operations followed by several read operations and illustrates the read and write timing of the AXI4-Lite interface.

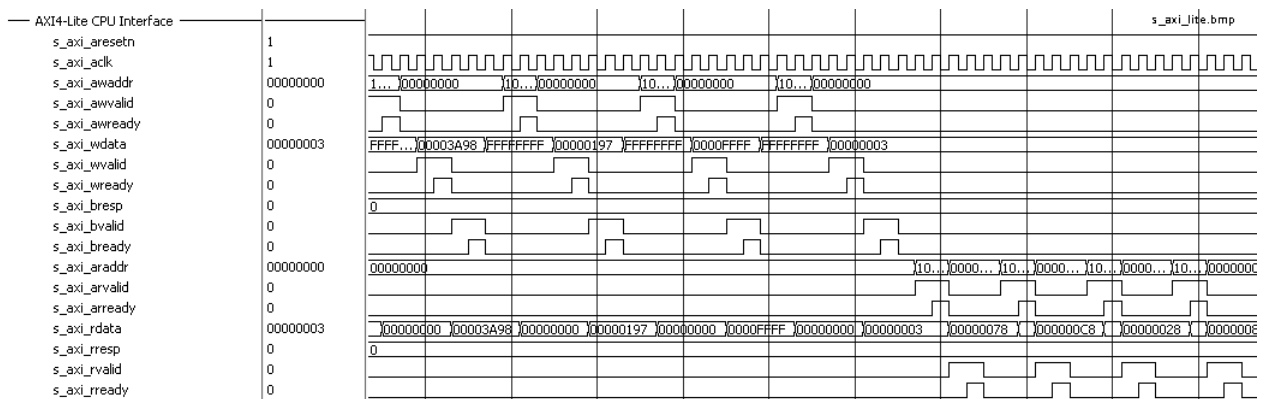


Figure 4-5: AXI Slave Write and Read Operations

All AXI4-Lite signals not required by the AXI4-Lite specification have no connection to the deinterlacer.

General Purpose Processor (GPP) Interface

The video deinterlacer can be configured to have a simple GPP interface instead of an AXI4-Lite port. This interface exposes all the GPP accessible registers for direct control by the system designer. The exception is that an interrupt mechanism is not available. The target system must monitor the status lines on the GPP to determine if any failures or faults have occurred.

The GPP signals are synchronous to the GPP clock domain. The internals of the deinterlacer operate using several clock domains. The same update mechanism for internal registers is

used by the GPP port. The controlling system must prime the GPP signals on the GPP clock domain and then raise the "update request" input line. The deinterlacer then updates its internal registers on the next available frame interrupt and responds by raising the "update done" GPP output signal. The user should then lower the "update request" signal. This technique allows for the synchronous changing of deinterlacer operations resulting in an output that is always glitch free.

Control Interface

There are two control interface options available in CORE Generator software; EDK pCore or GPP. The interface types differ primarily in the method of delivery of the user-defined control values.

Control Values

In both GPP and pcore modes, the control values are provided dynamically at the input of the deinterlacer and can be changed during run time.

For the pcore version of the core, CORE Generator software provides the GPP core placed in a wrapper, which allows you to parameterize the deinterlacer core in EDK. The ports are driven by registers on a AXI4-Lite bus. The address is decoded in the wrapper. A MicroBlaze™ processor software driver is provided in source code form to drive these ports.

The parameters that can be set dynamically via AXI4-Lite registers are:

- Packing: controls the YUV packing mode used; 4:2:2, 4:2:0 or 4:4:4
- Kernel mode: controls what deinterlacer algorithms are used
- Threshold T1: controls the low motion threshold
- Threshold T2: controls the high motion threshold
- Cross fade ratio: controls the scaling factor used by the cross fader
- Xsize, Ysize: controls the active window size of the output video frame
- Field order: sets the field order as: HD,PAL or NTSC
- Color: selects which color space is processed, YUV or RGB
- Black: sets the pixel value for black inside the core, dependent on color space setting
- Fsword: set the amount of 32-bit words that are required to store one field of video in the external memory buffer
- Fsbases,0,1,2: sets the 32-bit base addresses of the three external field buffers
- PsF mode: controls if the deinterlacer is processing interlaced, PsF or progressive image structures
- Pull-down mode: controls if the pull-down controller is activated

Memory Interface

The video deinterlacer motion kernel requires video frame history to deinterlace the input video stream. The input video stream is processed and stored into an external memory store along with specific associating sideband information. The external memory store is then used in the reconstruction of the output video stream.

The memory controller splits up external memory into a rolling three video-field store, where one field is written to while two fields are read from. This triple field buffer is controlled autonomously by the deinterlacer and driven through the AXI4-MM streams.

The AXI4-Lite interface allocates the base addresses of the three field buffers and the physical size of a buffer. System software can dynamically alter this on the fly if required to adapt to changing video formats.

The memory interface runs in its own clock domain. The clock rate of this interface must run at a slightly higher rate than the video interface clock.

AXI4 Memory and Interface

The key features of the AXI-MM port are:

- Single port to move all 3 deinterlacer streams, reducing AXI-interop overhead
- Asynchronous clock to Deinterlacer video path, allowing AXI clock to match interconnect to ensure highest efficiency bursting.
- Multi thread support. To allow multiple data streams to move across a common bus
- Multiple outstanding requests. To reduce system latency impacts
- Scalable from 32 to 256 bits wide.

The AXI4-MM port stores and extracts video fields and error information used by the deinterlacer core. The AXI4-MM port operates in a multi-threaded bi-directional manner. The internal Deinterlacer has 3 independent data streams all moving the internal packed data format. These streams comprise of one write stream and two read streams.

To further provide efficient memory utilization, the pixel stream and error stream are packed into the AXI data streams. Depending on the configured bit depth, there are three different packing formats.

[Figure 4-6](#) illustrates the memory packing algorithm. Fields marked "pix" indicate 444 pixels and fields marked "err" are the associated motion error vector.

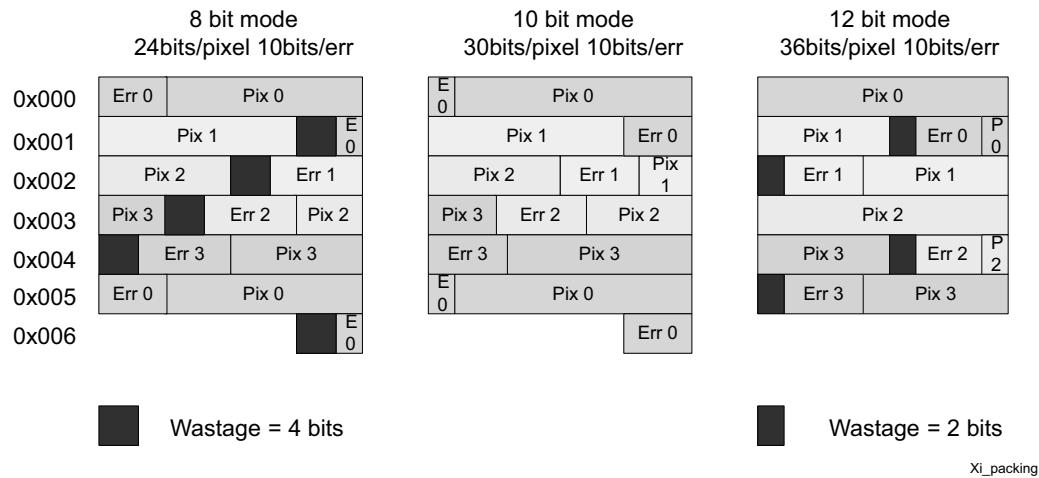


Figure 4-6: AXI4-MM Data Packing Format

When calculating external memory requirements for the deinterlacer, the packing method and input video field size must be considered. For 8 and 10-bit color depth, the ratio is 5/4 as 5 words are required to store 4 pixel/error pairs. For 12-bit color depth, the ratio is 3/2 as 3 words are required to store 2 pixel/error pairs.

For example:

An 8-bit image with 720 wide requires : $720 * (5/4)$ dwords = "900" per line

A 12-bit image with 1920 wide requires: $1920 * (3/2)$ dwords = "2880" per line

Write Stream

The AXI memory controller uses the AXI-Write channel to push all write data onto the AXI-interconnect at the configured data-width given. All bursts are a fixed length of 32 beats in length (`m_axi_awlen`). Thus for wider data bus widths more data is conveyed per burst.

All write operations ensure highest bus efficiency with back-to-back data packing and no narrow transactions. The Deinterlacer will only request a AXI transaction if it has data to immediately move.

The write stream will only generate 1 outstanding transaction at a time. A typical burst is shown below of beat length 0x1F, to address 0x41700E00. The initial queuing of the burst can be seen, followed by a continuous of 32 beat burst of data. Whilst "m_axi_wvalid" is constantly high, the "m_axi_wready" pushback from the AXI-interconnect is demonstrating possible throttling by a downstream memory controller.

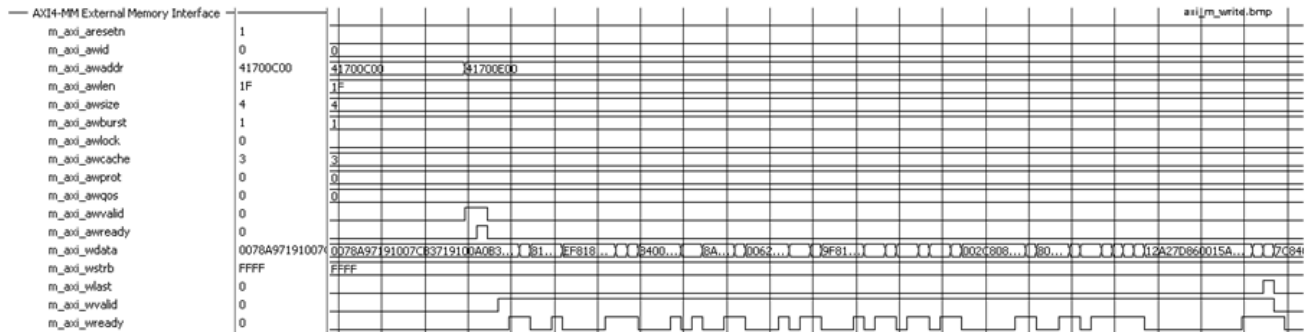


Figure 4-7: Write Stream Burst

Read Stream

The AXI memory controller uses the RD channels of AXI to extract 2 streams of video information from the external memory interface. To ensure efficient use of the AXI bus and external memory controller, the deinterlacer's memory controller uses :

- Multiple outstanding reads to ensure system latency's have no impact on the deinterlacer processing.
- Multiple thread-id's to all for 2 read-streams to share a single common AXI port.

Any downstream memory controller must be configured to support the above features. The Xilinx AXI-Memory controller can easily be configured for such a usage model.

To ensure no wasted AXI bandwidth or interconnect throttling occurs, the Deinterlacer will only issue read requests if it can fully accept the read data. The read-ready strobe is permanently tied high (m_axi_rready).

All bursts are a fixed length of 32 beats in length (m_axi_arlen). Thus for wider data bus widths more data is conveyed per burst. No narrow bursting is done

Each of the 2 streams are given a static unique AXI "thread-id", these being 0 & 1. When transactions are posted onto the AXI-interconnect, the downstream module will maintain a list of the id's of each request and return the id alongside the returning data burst. The Deinterlacer then routes the inbound data to the correct internal read stream.

In order to cater for unpredictable system latencies the Deinterlacer per thread-id issues up to 2 outstanding read request. A maximum of 4 outstanding requests can be seen in systems with high read latency, and the target memory control should be configured to support this mode of operation.

Shown below is a multi-threaded read operation, the diagram is highlighted to indicate thread 0 and 1's independent read requests, followed by the returning data (tagged with the correct id) The diagram also illustrates an external memory controller that is unable to

fully supply data to the axi-interconnect at its line rate, and thus m_axi_rvalid is toggling throughout the read data bursts.

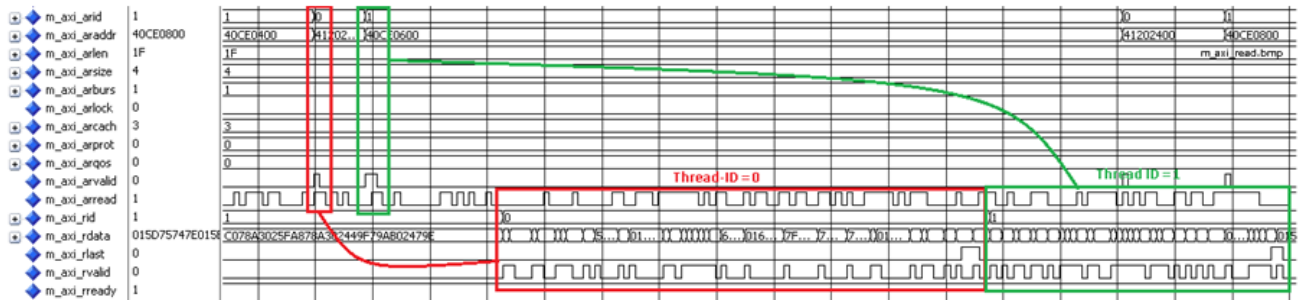


Figure 4-8: Read Stream Burst

Clocking

There is a minimum clock requirement on the AXI clock (m_axi_aclk). The AXI-MM domain must provide the deinterlacer with its data in a timely manner. This requirement combined with the packing formats inside the AXI controller and the data width of the AXI-MM bus yield a minimum clock rate.

The formulas below are theoretical minimums that assume the read and write streams can process data with 100% efficiency. If the system cannot achieve this, the AXI clock rate should be scaled accordingly to cater for the correct system efficiency.

The base formula is:

$$\text{write_32bit_words_second} = \text{packing ratio} * \text{pixel rate}$$

$$\text{read_32bit_words_second} = 2 * \text{packing ratio} * \text{pixel rate}$$

$$\text{axi_clk} = \text{read_32bit_words_second} * (\text{axi_data_width} / 32)$$

Shown below is a selection of examples of the above equations.

AXI Clock Rate	Pixel Rate	Packing Ratio	Reads/Sec	Writes/Sec	AXI Data Width
33.75MHz	(SD) 13.5MHz	8bit = (5/4)	33.75MHz	16.875MHz	32bits
185.6MHz	(HD) 74.25MHz	8bit = (5/4)	185.6MHz	92.8MHz	32bits
46.4MHz	(HD) 74.25MHz	8bit = (5/4)	185.6MHz	92.8MHz	128bits
111.3MHz	(HD) 74.25MHz	12bit = (3/4)	222.75MHz	111.3MHz	64bits

Video Interface

The video deinterlacer has one input and output video port. The input video timing (hblank/vblank) is used solely to identify the first pixel of each input frame. The specific width of the horizontal and height of vertical blanking intervals are not significant but must have a minimum width of one video clock pulse.

The deinterlacer only processes the active video portion of the input video, all other blanking data is discarded. Critically, the core generates pixels at twice the input rate of input video data. To ensure the system can process the input data without losing pixels, a core wide video clock-enable strobe is provided.

This must be used on the input side to throttle the input video to half the video clock rate. The waveform of the clock enable must only maintain an average of 50% active, the period of this signal can be random. [Figure 4-9](#) illustrates an example video clocking of the deinterlacer.

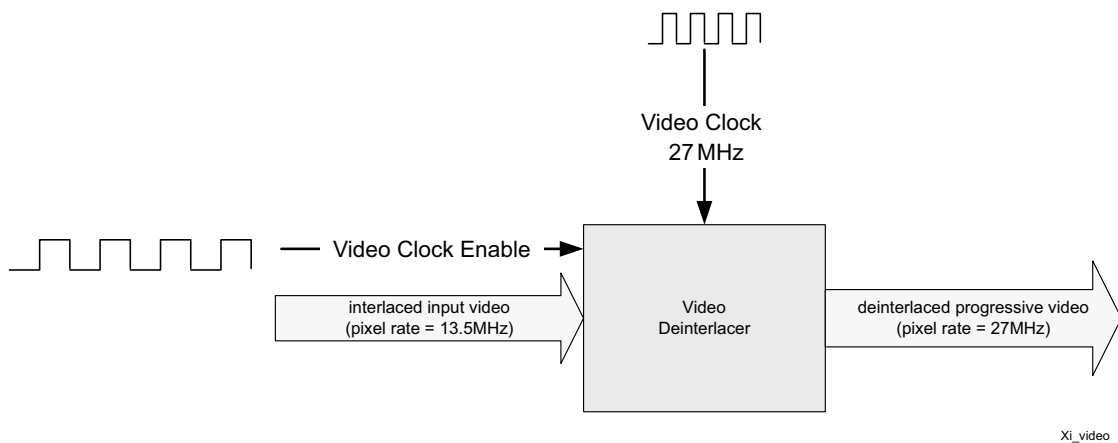


Figure 4-9: Input to Output Video Clock Ratio for SD

The core output is always progressive in format when the deinterlacer is enabled and a synthetic video timing frame is constructed around the output stream to provide vertical and horizontal blanking strobes for downstream cores.

Figure 4-10 illustrates typical input and output frame structures.

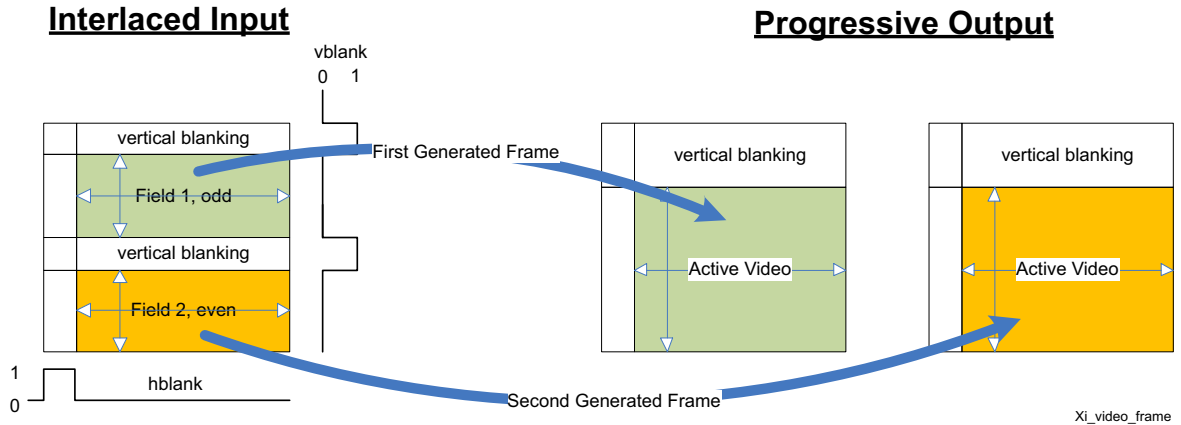


Figure 4-10: Input and Output Video Timing Formats

The video deinterlacer can process either 4:2:0, 4:2:2 or 4:4:4 video formats. These can either be statically set at core configuration time or can be configured to be dynamically controllable by system software.

Figure 4-11 illustrates the video timing of the various supported packing formats.

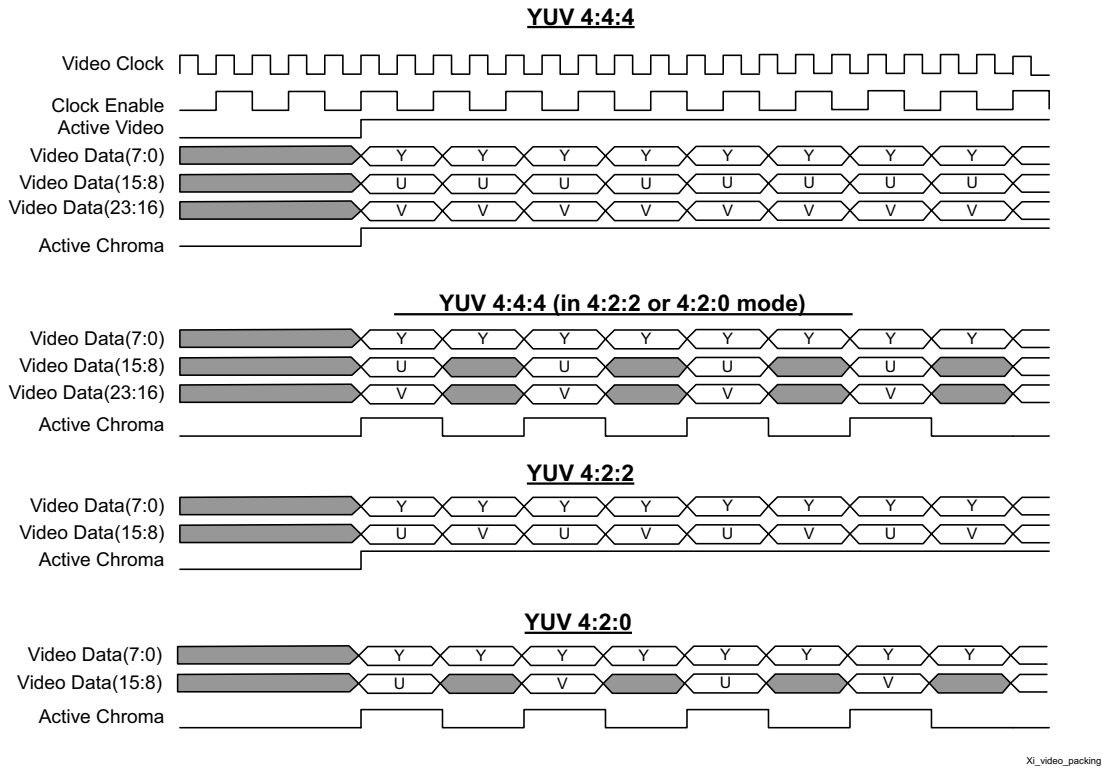


Figure 4-11: XSVI Input and Output Packing Formats

When using the motion kernel, the deinterlacer must have two fields of video history to create the desired output. During a video input standard change, start-up condition or error state, there is no video history for the deinterlacer to use. For these frames, the deinterlacer produces progressive video outputs without the aid of the motion adaptive kernel. Consequently, these initial frames appear softer in format until the memory interface has obtained sufficient history so that it can produce the required output quality.

Figure 4-12 illustrates the sequencing of the deinterlacer output with respect to input variance. The diagram shows the two initial frames (1 and 2) being created from raw passing video and then the remainder (3-7) being produced with the aid of the historical data.

The second image shows a normally operating deinterlacer that is suddenly subjected to a change in input video. The deinterlacer then resets the memory interface and reverts to a lower quality, while it builds up new picture history over the first two frames. It then reverts to a fully operational state from then on.

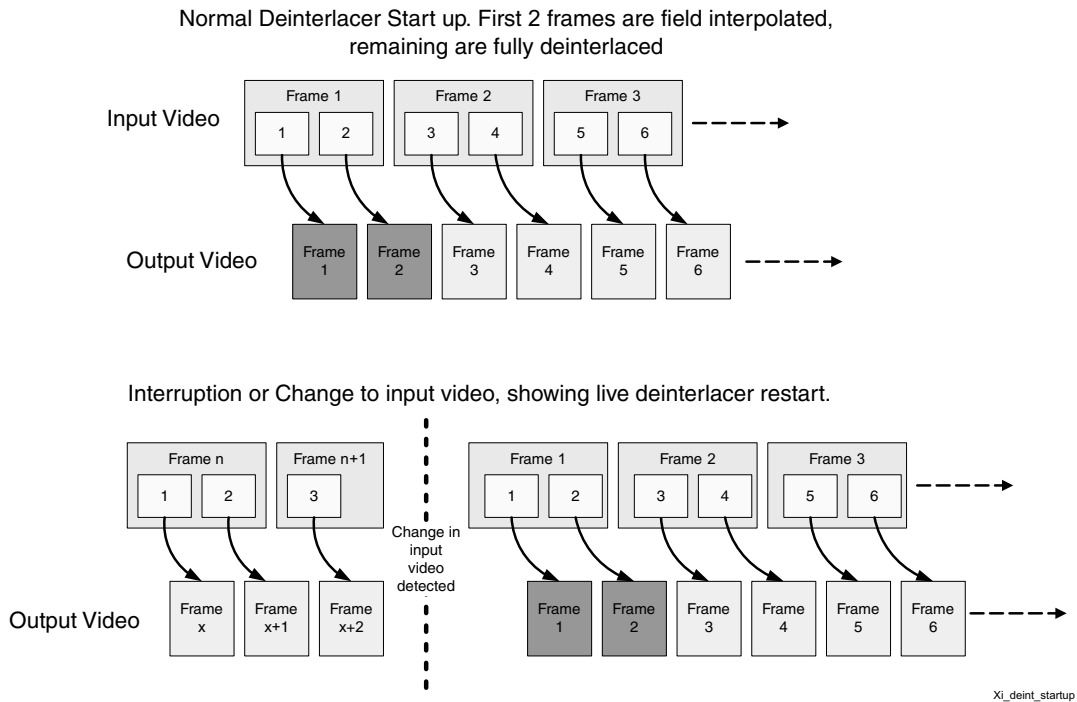


Figure 4-12: Examples of Deinterlacer Start-up Conditions

Clocking

To provide a compact design, the deinterlacer provides only minimal buffering required in performing the deinterlacing operation. Extra buffering required by the use of the full/pause-flags as system push back are outside the scope of this module.

The Video Deinterlacer comprises these clock domains:

- Video Clock Domain: All video passes through this common clock domain and the deinterlacer core resides here.
 - AXI4-Lite Clock Domain: The AXI4-Lite interface and interrupt signalling operates on its own exclusive domain.
 - Memory Clock Domain: All memory ports use a common clock that is exclusive to the memory interface(s).
 - The user can combine or keep these clock domains separate as per their architecture requirements.
-

Resets

The Video Deinterlacer core has multiple reset inputs, one for each clock domain. The Video Deinterlacer core comprises these reset inputs.

- Video Clock Domain: sclr (active high)
 - AXI4-LiteClock Domain: s_axi_aresetn (active low)
 - Memory Clock Domain: m_axi_aresetn (active low)
-

Protocol Description

The Video Deinterlacer core register interface is compliant with the AXI4-Lite interface. The memory interface is compliant with the AXI4 Memory Mapped interface. The Video Deinterlacer output interface can be configured to be compliant with the AXI4-Stream interface.

Constraining the Core

Required Constraints

There are no required constraints for this core.

Device, Package, and Speed Grade Selections

There are no Device, Package or Speed Grade requirements for this core.

Clock Frequencies

There are no specific clock frequency requirements for this core.

This core has not been characterized for use in low power devices.

Clock Management

The Video Deinterlacer core has 3 clock inputs: `vid_clk`, `m_axi_aclk`, and `s_axi_aclk`. The `s_axi_aclk` is used for the CPU interface AXI4-Lite port. The `m_axi_aclk` is used for the input/output AXI Memory Mapped interface. The `vid_clk` is used for the video input and output interfaces and the internal deinterlacer processing. All 3 clock domains can be considered asynchronous to each other. No relationship is required.

Clock Placement

There are no specific Clock placement requirements for this core.

Banking

There are no specific Banking rules for this core.

Transceiver Placement

There are no Transceiver Placement requirements for this core.

I/O Standard and Placement

There are no specific I/O standards and placement requirements for this core.

Detailed Example Design

The deinterlacer is typically used in the broadcast video conversions of SD and HD material to progressive formats for subsequent display on a display monitor.

Case 1: SD480i to SD480p

One typical use of the deinterlacer is the fixed conversion of NTSC to 480p video. In this application, the deinterlacer uses the GPP interface and the configuration values are statically wired at the top layer of the final design. A CPU is not required for this implementation.

The core is configured to process an 8-Bit 4:2:2 YUV stream coming from a XSVI SDI input stream. The T1, T2 and cross fade ratio settings are wired to their default values. Full deinterlacing is enabled.

Given a pixel rate of 13.5 MHz for SD video, the video clock required is at least 27 MHz as shown in Figure 6-1. This can be derived from the incoming video and passed through a DCM to double the clock rate.

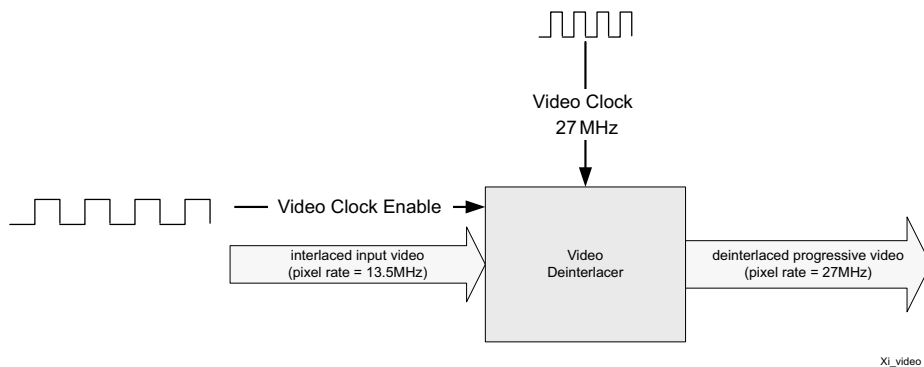


Figure 6-1: Example SD Data Path

The memory clock is set by considering the bit depth and pixel rate. Since 8-bit video is used, the packing ratio is 5/4. A safety margin of 70% AXI4-MM utilization is used. Taking these factors into account, the minimum memory clock rate is:

$$\text{Memory clock} = [13.5 \text{ MHz} * (5/4) *] / 0.70 = 24.1 \text{ MHz}$$

The SDI system clock minimum is 13.5 MHz. Using a minimal clock approach, the video clock and memory clock can be connected and run at a common multiple of 13.5 MHz. 27 MHz is the first DCM multiple to satisfy the requirements of both the memory clock and video clock.

The memory bandwidth can now be determined. The deinterlacer has three memory streams, so the effective memory bandwidth of SD is:

$$24.1 \text{ MWords/Second} * 3 \text{ streams} = 72.3 \text{ MW/s or } 289 \text{ Mbytes/s}$$

Case 2: HD1080i to HD1080p

Another typical use of the deinterlacer is for the conversion of 1080iHD to 1080pHD video. In this application, the deinterlacer uses the AXI4-Lite interface and the configuration values are dynamically set by the system software.

The core is configured to process a 10-bit 4:4:4 YUV stream from a XSVI SDI input stream. The T1, T2 and cross fade ratio settings are set to their default values; full deinterlacing is enabled.

Given a pixel rate of 74.25 MHz for HD video, the video clock required is at least 148.5 MHz as shown in [Figure 6-2](#).

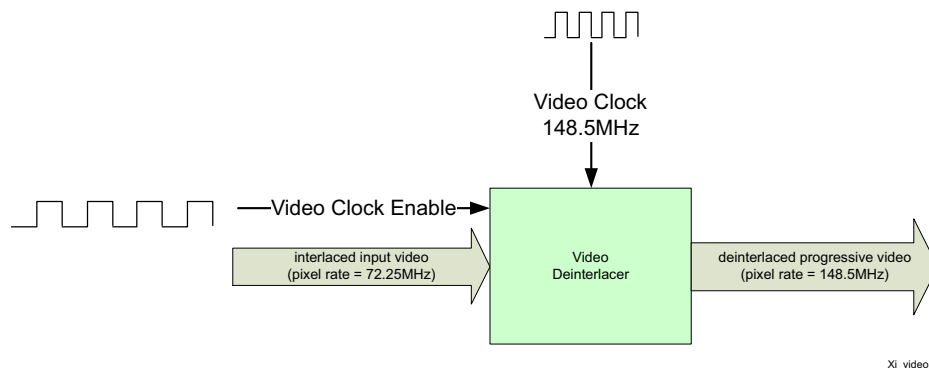


Figure 6-2: Example HD Data Path

The memory clock is set by considering the bit depth and pixel rate. Using 12-bit video, the packing ratio is 3/4, and with a safety margin of 60% AXI4-MM utilization, the minimum memory clock rate is:

$$\text{Memory clock} = [74.25 \text{ MHz} * (3/2)] / 0.60 = 185 \text{ MHz}$$

The memory bandwidth can now be determined. The deinterlacer has three memory streams, so the effective memory bandwidth of SD is:

$$185 \text{ MWords/Second} * 3 \text{ streams} = 556 \text{ MW/s or } 2.2 \text{ GBytes/s}$$

For example, selecting a 32-bit DDR interface with a fabric clock rate of 200 MHz, physical clock rate of 400 MHz and DDR3-800 device, the theoretical bandwidth is 3.2 GBytes/s. This device configuration would sustain the deinterlacer, leaving 1 GB/s for other applications.

Directory and File Contents

- Expected
 - c_deinter0000.bmp
 - c_deinter0001.bmp
 - c_deinter0002.bmp
 - c_deinter0003.bmp
 - c_deinter0004.bmp
 - c_deinter0005.bmp
 - c_deinter0006.bmp
 - c_deinter0007.bmp
 - c_deinter0008.bmp
 - c_deinter0009.bmp
 - c_deinter0010.bmp
 - c_deinter0011.bmp
 - c_deinter0012.bmp
 - c_deinter0013.bmp
 - c_deinter0014.bmp
 - c_deinter0015.bmp
 - c_deinter0016.bmp
 - c_deinter0017.bmp
 - c_deinter0018.bmp
 - c_deinter0019.bmp
 - c_deinter0020.bmp
- Stimuli
 - FormulaOne_035.yuv
 - FormulaOne_036.yuv
 - FormulaOne_037.yuv

- FormulaOne_038.yuv
- FormulaOne_039.yuv
- FormulaOne_040.yuv
- FormulaOne_041.yuv
- FormulaOne_042.yuv
- FormulaOne_043.yuv
- FormulaOne_044.yuv
- FormulaOne_045.yuv
- FormulaOne_046.yuv
- FormulaOne_047.yuv
- FormulaOne_048.yuv
- Results
- src
 - v_deinterlacer_v2_00_a_u0.vhd
 - v_deinterlacer_v2_00_a_u0.xco
- tb_src
 - axi_model.vhd
 - bmp_reader.vhd
 - bmp_writer.vhd
 - include_deint_tb.vhd
 - mpmc_model.vhd
 - testbench.vhd
 - vid_gold.vhd
 - vid_reader.vhd
 - vid_writer.vhd
 - yuv_writer.vhd
- isim_wave.wcfg - Waveform configuration file for iSim
- mti_wave.do - Waveform configuration for ModelSim
- run_isim.bat - Runscript for iSim in Windows OS
- run_isim.sh - Runscript for iSim in Linux OS
- run_mti.bat - Runscript for ModelSim in Windows OS

- `run_mti.sh` - Runscript for ModelSim in Linux OS
-

Demonstration Test Bench

A demonstration test bench is provided as a simple introductory package that enables you to observe the core generated by the CORE Generator tool operating in a waveform simulator. You are encouraged to observe core-specific aspects in the waveform, make simple modifications to the test conditions, and observe the changes in the waveform.

Simulation

- Simulation using ModelSim for Linux:
From the console, Type **`source run_mti.sh`**.
 - Simulation using ModelSim for Windows:
Double-click on `run_mti.bat` file.
 - Simulation using iSim for Linux:
From the console, Type **`source run_isim.sh`**.
 - Simulation using iSim for Linux:
Double-click on `run_isim.bat` file.
-

Messages and Warnings

"Memory Collision Errors" have been observed when running the demonstration test bench. The issue has been investigated and it has been determined that these errors can be safely ignored. This error message can be suppressed in ModelSim when the global `SIM_COLLISION_CHECK` option is set to `NONE`.

Verification, Compliance, and Interoperability

Simulation

A validation suite consisting of a precompiled Windows C model and RTL test bench framework is included with the video deinterlacer. Both environments allow users to stream their own 24-bit true color BMP or YUV8/YUV10 files into the simulator and produce real BMP output files. This advantage allows for real world examples to be tested with the deinterlacer in advance. Additionally, an AVI video sequence file is also generated by the C model, allowing users to view animated results of the simulation in their chosen video program.

Additional system simulation and FPGA colorization is available via the AXI4-Lite interface to illustrate the algorithms operation and decision matrix in live operation. This can be useful if dynamic control of the thresholds is done by the system software. [Figure A-1](#) shows a normal fully deinterlaced output. Note the smoothed lines of the deinterlacer.



Figure A-1: No Colorization

Figure A-2 is the same image with full diagonal colorization enabled. The green highlight shows the diagonal edges that were detected and then enhanced.



Figure A-2: **Diagonal Colorization**

Figure A-3 is the same image with full motion colorization enabled. The three lines are moving upward. The three trailing motion vectors are in red around each white line. The red lines show the front and back edge motion of the line.



Figure A-3: **Motion Colorization**

Hardware Testing

Xilinx has a Real Time Video Engine reference design that has incorporated the Deinterlacer. The RTVE design targets both Spartan-6, Virtex-6, and Kintex-7 FPGA platforms.

Migrating

Parameter Changes in the XCO File

There were no parameter changes in the XCO file.

Port Changes

The video deinterlacer v2.0 has two extra GPP pins for the new features `gpp_accept_video` and `gpp_deint fld_22`.

The XSVI input now requires a "fsync_in" strobe to be provided.

Functionality Changes

The deinterlacer's internal algorithms have not changed in this revision. The supported interfaces have changed. The VFBC interface is no longer supported and has been removed. A new AXI4-Streaming input is available for use. The AXI4-Streaming input and output interfaces can use either `tuser(0)` or `fsync` to signal frame boundaries

Debugging

Step 1: Video Pass Through Bring Up

When initially bringing up the Deinterlacer in a simulator or FPGA environment, the Deinterlacer can be configured to use minimal external interfaces. Use of the interrupt mechanism is strongly advised, as this gives a real time indication of possible system issues.

After system reset the Deinterlacer will start in bypass mode. This mode of operation requires no external memory interface for the Deinterlacer to move video through itself. It does require that the input and output video streams are operational.

By using the interrupt mechanism, the user can determine if the system is stable as no error interrupts will occur. At this point video should be passing through the Deinterlacer data path in its native format, (except all blanking will have been removed) System designers should observe the video output matches the video input.

If error interrupts occur, the likelihood is that either the input or output fifo's have over run. This occurs only when XSVI ports are enabled. For AXI4-Streaming the deinterlacer will pause until data can be moved through the deinterlacer.

- Input fifo overrun occurs if the output fifo is stalled for too long, or the `vid_clk` is not running fast enough.
- Output fifo overrun occurs if the output fifo is stalled for too long (>1000 clks)

Step 2: Basic Deinterlacing

The user should configure the deinterlacer registers for the correct video raster size, basic "field interpolation mode" and then schedule the Deinterlacer to start on the next frame. At the next frame boundary the Deinterlacer will become "synchronised" this can be seen at the top level pin "deint_sync" and also by an interrupt or reading the status register.

At this point the Deinterlacer will now start producing deinterlaced video output. The output video interface pixel rate will now double. If a fault occurs then the Deinterlacer will either lose sync or generate a fifo error. The probable reasons for these are :

- Loss of sync; due to automatic recovery from an internal fifo overrun error, or the X/Y dimensions do not match the input video X/Y dimensions. The Deinterlacer must internal track X/Y so these registers must match.
- System error; if this is the first time the error has been seen, then the likelihood is either that the vid_clk is not fast enough to allow pixel output at 2x the input rate, or the output fifo has stalled the video and a backlog of >1000 pixels has occurred inside the Deinterlacer.

Step 3: Full Deinterlacing Using Memory Controller

At this point the Deinterlacer should be doing on the fly deinterlacing without the use of the AXI-MM port. Program the base addresses of the triple buffers to target a unique area of external memory. Update the mode register to select motion/full deinterlacing method. The Deinterlacer will on the next frame boundary start the memory interface port.

Under normal operation only the frame interrupt should ever trigger.

If a system error occurs, they can be broken down into 3 types

- Write stream overflow; the AXI-Write port does not have enough bandwidth to keep up with the demand off the Deinterlacer. If possible and applicable, either increase the m_axi_aclk rate or in the case of AXI, increase the data width of this port.
- Read stream 0, Read stream 1 underflow; Either of the two internal read datapaths fifo's have under run. This is generally due to excessive system latency, or to slow a m_axi_aclk rate.

Possible chipscope analysis using an AXI -Bus-Monitor would best help understand the bottleneck here.

Step 4: Check the Algorithms for Incorrect Video Output

By using the inbuilt colourisation mode, the diagonal and motion kernel operations can be tracked. Turn on the colourisation modes and observe the output video. Using a known video test sequence the colourisation should show the motion artifacts and diagonal edge detections (only in moving objects). If the motion trails do not match the image then there is most likely data corruption in the external memory interface port. Although the transactions might be running cleanly, the triple buffers data would seem to be corrupt.

If corruption is visible, by activating PsF mode, the Deinterlacer is forced to use the external memory for every Deinterlaced video line. By enabling this mode, the user can validate the external memory is not corrupt.

Step 5: Pull-down Testing and Pitfalls

When applicable, the inbuilt cadence detectors can be individually enabled / disabled. Once enabled, the detectors will periodically activate/deactivate. In images with low/no motion the cadence detectors may disable until such time as significant motion occurs again. This is normal operation. If the user is monitoring the pulldown interrupts they will see this periodic cycling.

For instance, in the case of scene changes through black, the cadence detector may also drop out momentarily. As no motion is visible at this point the quality of the video output will still be of highest quality even though the cadence detector is inactive.

Failure to detect a cadence in a known sequence that should have 3:2 or 2:2 is generally down to poor quality video that has undergone various compression's/re-authoring steps. For example in converting a DVD to SDI, the quality of the hardware decoders and subsequent scalers, colour-space converters, chroma-resamplers etc., can all introduce sufficient noise and artifacts that makes the cadence become undetectable. This is specially in the case of 2:2 footage, 3:2 encoding is a more robust mechanism.

Application Software Development

pCore Driver Files

The Deinterlacer pCore includes a software driver written in the C programming language that the user can use to control the core. A high-level API provides application developers easy access to the features of the Xilinx® Object Segmentation core. A low-level API is also provided for developers to access the core directly through the system registers described in the previous section.

Table D-1 lists the files included with the Deinterlacer pCore driver.

Table D-1:

Name	Description
xdeint.h	Contains all prototypes of high-level API to access all of the features of the Xilinx Video Deinterlacer device.
xdeint.c	Contains the implementation of high-level API to access all of the features of the Xilinx Video Deinterlacer device
xdeint_intr.c	Contains the implementation of high-level API to access the interrupt feature of the Xilinx Video Deinterlacer device.
xdeint_sinit.c	Contains static initialization methods for the Xilinx Video Deinterlacer device.
xdeint_g.c	Contains a template for a configuration table of Xilinx Video Deinterlacer devices. This file is used by the high-level API and is automatically generated to match the Xilinx Video Deinterlacer device configuration by Xilinx EDK/SDK tools when the software project is built.
xdeint_hw.h	Contains low-level API (that is, identifiers and register-level driver API) that can be used to

pCore API Functions

This section describes the functions included in the pcore Driver files generated for the Deinterlacer pCore. The software API is provide to allow easy access to the registers of the pCore as defined in Table 2-4. To utilize the API functions provided, the following header files must be included in the user's C code:

```
#include "xparameters.h"
```

```
#include "xdeint.h"
```

The hardware settings of your system, including the base address of your Object Segmentation core are defined in the xparameters.h file. The xdeint.h file provides the API access to all of the features of the Deinterlacer device driver. More detailed documentation of the API functions can be found by opening the file index.html in the pCore directory deinterlacer_v2_00_a/doc/html/api

pCore API Functions in xdeint.c

- int XDeint_ConfigInitialize(XDeint *InstancePtr, XDeint_Config *CfgPtr, u32 EffectiveAddr)

This function initializes an Deinterlacer device

- XDeint_SetFramestore(XDeint *InstancePtr, u32 FieldAddr1, u32 FieldAddr2, u32 FieldAddr3, u32 FrameSize)

This function initialises the buffer pointers used by the deinterlacers external memory interface

- XDeint_SetVideo(XDeint *InstancePtr, u32 Packing, u32 Colour, u32 Order, u32 PSF)

This function sets up the type of video processing to perform

- XDeint_SetThresholds(XDeint *InstancePtr u32 t1, u32 t2)

This function alters the default motion thresholds

- XDeint_SetPulldown(XDeint *InstancePtr u32 lo, u32 hi, u32 enable)

This function enabled/disables the pulldown/cadence detectors

- void XDeint_GetVersion(XDeint *InstancePtr, u16 *Major, u16 *Minor, u16 *Revision)

This function returns the hardware version

- void XDeint_SetSize(XDeint *InstancePtr, u32 Width, u32 Height)

This function sets the video frame aperture of the input video.

Functions in xdeint_sinit.c

- XDeint_Config *XDeint_LookupConfig(u16 DeviceId)

This function returns a references to an Xdeint_config structure based on the unique device ID given

Functions in xdeint_intr.c

- void XDeint_IntrHandler(void *InstancePtr)

This function is the interrupt handler for the Deinterlacer driver

- int XDeint_SetCallBack(XDeint *InstancePtr,void *CallBackFunc)

This function installs an asynchronous callback function for the given handler type.

C Model Reference

The Xilinx LogiCORE™ IP Video Deinterlacer has a bit accurate C model for 32-bit Windows, 64-bit Windows, 32-bit Linux and 64-bit Linux platforms. The model has an interface consisting of a set of C functions, which reside in a statically link library (shared library). Full details of the interface are given in [Interface](#). An example piece of C code is provided in [Example Code](#) to show how to call the model. The model is bit accurate, as it produces exactly the same output data as the core on a frame-by-frame basis. However, the model is not cycle accurate, as it does not model the core's latency or its interface signals. The latest version of the model is available for download on the Xilinx LogiCORE IP Video Deinterlacer web page at:

<http://www.xilinx.com/products/ipcenter/EF-DI-DEINTERLACER.htm>

Unpacking and Model Contents

Unzip the `deinterlacer_v2_0_bitacc_model.zip` file, containing the bit accurate models for the Video Deinterlacer IP Core. This creates the directory structure and files in [Table E-1](#).

Table E-1: Directory Structure and Files of the Video Deinterlacer v2.0 Bit Accurate C Model

File Name	Contents
./doc	Documentation directory
README.txt	Release notes
pg017_deinterlacer.pdf	LogiCORE IP Video Deinterlacer Product Guide
Makefile	Makefile for running gcc via make for 32-bit and 64-bit Linux platforms
deinterlacer_v2_0_bitacc_cmodel.h	Model header file
yuv_utils.h	header file declaring the YUV image / video container type and support functions including .yuv file I/O
rgb_utils.h	header file declaring the RGB image / video container type and support functions
bmp_utils.h	header file declaring the bitmap (.bmp) image file I/O functions.
video_utils.h	header file declaring the generalized image / video container type, I/O and support functions

Table E-1: Directory Structure and Files of the Video Deinterlacer v2.0 Bit Accurate C Model (Cont'd)

File Name	Contents
video_fio.h	header file declaring support functions for testbench stimulus file I/O
run_bitacc_cmodel.c	example code calling the C model
./lin64	Directory containing Precompiled bit accurate ANSI C reference model for simulation on 64-bit Linux platforms.
libIp_deinterlacer_v2_0_bitacc_cmodel.so	Model shared object library
libstlport.so.5.1	Xilinx STL library, referenced by libIp_deinterlacer_v2_0_bitacc_cmodel.so
run_bitacc_cmodel	64-bit Linux fixed configuration executable
run_bitacc_cmodel_config	64-bit Linux programmable configuration executable
./lin	Directory containing Precompiled bit accurate ANSI C reference model for simulation on 32-bit Linux platforms.
libIp_deinterlacer_v2_0_bitacc_cmodel.so	Model shared object library
libstlport.so.5.1	Xilinx STL library, referenced by libIp_deinterlacer_v2_0_bitacc_cmodel.so
run_bitacc_cmodel	32-bit Linux fixed configuration executable
run_bitacc_cmodel_config	32-bit Linux programmable configuration executable
./nt64	Directory containing Precompiled bit accurate ANSI C reference model for simulation on 64-bit Windows platforms.
libIp_deinterlacer_v2_0_bitacc_cmodel.dll	Precompiled dynamic link library file for 64-bit Windows platforms compilation
libIp_deinterlacer_v2_0_bitacc_cmodel.lib	Precompiled static library file for 64-bit Windows platforms compilation
stlport.5.1.dll	Xilinx STL library
run_bitacc_cmodel.exe	64-bit Windows fixed configuration executable
run_bitacc_cmodel_config.exe	64-bit Windows programmable configuration executable
./nt	Precompiled bit accurate ANSI C reference model for simulation on 32-bit Windows platforms.
libIp_deinterlacer_v2_0_bitacc_cmodel.dll	Precompiled dynamic link library file for 32-bit Windows platforms compilation
libIp_deinterlacer_v2_0_bitacc_cmodel.lib	Precompiled static library file for 32-bit Windows platforms compilation
stlport.5.1.dll	Xilinx STL library
run_bitacc_cmodel.exe	32-bit Windows fixed configuration executable
run_bitacc_cmodel_config.exe	32-bit Windows programmable configuration executable
./examples	Example input files to be used with the run_bitacc_cmodel executable

Table E-1: Directory Structure and Files of the Video Deinterlacer v2.0 Bit Accurate C Model (Cont'd)

File Name	Contents
FormulaOne_035.yuv	Example YUV input file
FormulaOne_036.yuv	Example YUV input file
FormulaOne_037.yuv	Example YUV input file
FormulaOne_038.yuv	Example YUV input file
FormulaOne_039.yuv	Example YUV input file
FormulaOne_040.yuv	Example YUV input file
FormulaOne_041.yuv	Example YUV input file
FormulaOne_042.yuv	Example YUV input file

Installation

For Linux, make sure the following files are in a directory in the `$LD_LIBRARY_PATH` environment variable:

- `libIp_deinterlacer_v2_0_bitacc_cmodel.so`
- `libstlport.so.5.1`

Software Requirements

The Video Deinterlacer C models were compiled and tested with the software listed in [Table E-2](#).

Table E-2: Compilation Tools for the Bit Accurate C Models

Platform	C Compiler
Linux 32-bit and 64-bit	GCC 3.4.6 & 4.1.1
Windows 32-bit and 64-bit	Microsoft Visual Studio 2008

Interface

The Xilinx LogiCORE IP Video Deinterlacer bit-accurate C model core function is provided as a statically linked library. The bit-accurate C model is accessed through a set of functions and data structures, declared in the header file

`deinterlacer_v2_0_bitacc_cmodel.h`. A higher-level software project may make function-calls to the functions below:

```

/**
 * Create a new state structure for this C-Model.
 *
 * IMPORTANT: Client is responsible for calling
 *            xilinx_ip_deinterlacer_v2_0_destroy_state()
 *            to free state memory.
 *
 * @param generics    Generics to be used to configure C-Model
 *                    state.
 *
 * @returns xilinx_ip_deinterlacer_v2_0_state* Pointer to the internal
 *                    state.
 */
struct xilinx_ip_deinterlacer_v2_0_state*
xilinx_ip_deinterlacer_v2_0_create_state(struct
xilinx_ip_deinterlacer_v2_0_generics generics);

/**
 * Simulate this bit-accurate C-Model.
 *
 * @param state      Internal state of this C-Model. State
 *                    may span multiple simulations.
 * @param inputs     Inputs to this C-Model.
 * @param outputs    Outputs from this C-Model.
 *
 * @returns Exit code Zero for SUCCESS, Non-zero otherwise.
 */
int xilinx_ip_deinterlacer_v2_0_bitacc_simulate
(
  struct xilinx_ip_deinterlacer_v2_0_state* state,
  struct xilinx_ip_deinterlacer_v2_0_inputs inputs,
  struct xilinx_ip_deinterlacer_v2_0_outputs* outputs
);

```

Before using the model, the structures holding the generics, inputs, and outputs of the Deinterlacer instance have to be defined:

```

struct xilinx_ip_deinterlacer_v2_0_generics generics;
struct xilinx_ip_deinterlacer_v2_0_inputs inputs;
struct xilinx_ip_deinterlacer_v2_0_outputs outputs;

```

Declaration of the above structures can be found in `deinterlacer_v2_0_bitacc_cmodel.h`.

Before making the function calls, the following steps are necessary:

1. Populate the 'generics' structure. It defines the values of build-time parameters. Please see [Deinterlacer Generics Structure](#) for more information on the structure and an example of how to initialize.
2. Populate the 'inputs' structure. It defines the values of run-time parameters. Please see [Deinterlacer Inputs Structure](#) for more information on the structure and an example of how to initialize.
3. Populate the 'outputs' structure. Please see [Deinterlacer Outputs Structure](#) for more information on the structure and an example of how to initialize.

After the inputs are defined and all `video_structs` initialized the model can be simulated by calling the following functions

```

state = xilinx_ip_deinterlacer_v2_0_create_state(generics);
if (state == NULL) {
    printf("ERROR: could not create state object\n");
    return 1;
}

// Simulate the core
printf("Running the C model...\n");
if(xilinx_ip_deinterlacer_v2_0_bitacc_simulate(state, inputs, &outputs) != 0) {
    printf("ERROR: simulation did not complete successfully\n");
    return 1;
} else {
    printf("Simulation completed successfully\n");
}

```

Results are provided in the outputs structure, which contains only one member of type `video_struct`. More information on the `video_struct` structure can be found in [Deinterlacer Video Structure](#). Successful execution of all provided functions return value 0, otherwise a non-zero error code indicates that problems were encountered during function calls.

Deinterlacer Generics Structure

The Xilinx LogiCORE IP Video Deinterlacer Core bit accurate C model takes multiple generic parameters. All generic parameters are integers or integer arrays. See [Table E-3](#) for generic definitions.

Table E-3: Deinterlacer Generics Structure

Generic	Designation
C_STREAMS	Number of simultaneous color planes Valid values are 2 or 3.
C_DEPTH	Bit depth of a pixel Valid values are 8, 10 or 12
C_DIAG	Enable the diagonal kernel 0 = disables the diagonal kernel 1 = enables the diagonal kernel
C_MOTION	Enable the motion kernel 0 = disables the motion kernel 1 = enables the motion kernel

Table E-3: Deinterlacer Generics Structure

Generic	Designation
C_PULLDOWN	Cadence/Pull-down detection 0 = No pull-down detection 1 = Full pull-down detection
C_COL	Static color space setting 0 = YUV 1 = RGB

Calling `xilinx_ip_deinterlacer_v2_0_get_default_generics()` initializes the generics structure, `xilinx_ip_deinterlacer_v2_0_generics`, with the deinterlacer defaults. An example of initialization of the generics structure is as follows:

```
generics = xilinx_ip_deinterlacer_v2_0_get_default_generics(); //Get Defaults
```

Deinterlacer Inputs Structure

The structure `xilinx_ip_deinterlacer_v2_0_inputs` defines the values of run time parameters and the actual input video frames/images.

```
struct xilinx_ip_deinterlacer_v2_0_inputs
{
    struct video_struct video_in;

    struct deinterlacer_cfg_struct *cfg;
    struct deinterlacer_pull_struct *pull;

}; // end xilinx_ip_deinterlacer_v2_0_inputs
```

The `video_in` variable is an array of `video_struct` structures, one structure per layer. See the Deinterlacer Video Structure for a description of the `video_in` structure. The `video_in` structure must be initialized.

Deinterlacer Config Structure

The `cfg` variable is a pointer to the `deinterlacer_cfg_struct`. The `deinterlacer_cfg_struct` is defined as:

```
struct deinterlacer_cfg_struct
{
    int frame;
    int bmpfiles;
    int txtfiles;
    int rate;
    int t1;
    int t2;
    int pull_lo;
    int pull_hi;
    int pixel_scale;
```

```

int filewidth;
int fileheight;
int depth;
int format;
int mode;
int order;
int pulldown;
int cropx;
int cropy;
int width;
int height;
int length;
int index;
int debug;
int pixel_mask;
char source[256];
char prefix[256];
char num_len;
char suffix[256];
char golden[256];
FILE *avifile;

int lut[4096];

};

```

Pull-down Structure

The pull variable is a pointer to the `deinterlacer_pull_struct`. The `deinterlacer_pull_struct` is defined as:

```

struct deinterlacer_pull_struct{
    // Internal 22 State Machine
    int trained_22;
    int trained_22_d1;
    int last_22_delta;
    int confidence_22;

    // Internacer 32 State Machine
    int cx_32;
    int switch_32;
    int next_field_32;
    int bad_time_32;
    int bad_32;
    int trained_32;
    int trained_32_d1;
    int state_32;
    int p24_32;

    // Top level cotrol
    int active_32_early;
    int active_32;
    int active_22_early;
    int active_22;
    int mux_switch;
    int next_field;
    int p24;
}

```

```
};
```

Deinterlacer Outputs Structure

The structure `xilinx_ip_deinterlacer_v2_0_outputs` provides the actual output video frames/images of the deinterlacer core. This structure is a wrapper to the standard `video_struct` used by other Xilinx video core C models.

```
struct xilinx_ip_deinterlacer_v2_0_outputs
{
  struct video_struct video_out;
}; // xilinx_ip_deinterlacer_v2_0_outputs
The video_out structure must be initialized. The following code shows a typical
video_out initialization.
// Setup Output Video Buffer
outputs.video_out.frames = inputs.num_frames;
outputs.video_out.rows = inputs.frame_cfg->y_size;
outputs.video_out.cols = inputs.frame_cfg->x_size;
outputs.video_out.mode = FORMAT_C444;
outputs.video_out.bits_per_component = generics.C_DATA_WIDTH;
outputs.video_out.data[0] = NULL;
outputs.video_out.data[1] = NULL;
outputs.video_out.data[2] = NULL;
```

Deinterlacer Video Structure

Input images or video streams can be provided to the Deinterlacer v2.0 reference model using the `video_struct` structure, defined in `video_utils.h`. Output images or video streams are also placed within a `video_struct` structure. The `video_struct` is defined as:

```
struct video_struct{
  int frames, rows, cols, bits_per_component, mode;
  uint16*** data[5];
};
```

The structure member variables are defined in [Table E-4](#).

Table E-4: Member Variables of the Video Structure

Member Variable	Designation
frames	Number of video/image frames in the data structure
rows	Number of rows per frame Pertains to the image plane with the most rows and columns, such as the luminance channel for YUV data. Frame dimensions are assumed constant through the all frames of the video stream, however different planes, such as y, u and v can have different smaller dimensions.

Table E-4: Member Variables of the Video Structure

Member Variable	Designation
cols	Number of columns per frame Pertains to the image plane with the most rows and columns, such as the luminance channel for YUV data. Frame dimensions are assumed constant through the all frames of the video stream, however different planes, such as y, u and v can have different smaller dimensions.
bits_per_component	Number of bits per color channel/component. All image planes are assumed to have the same color/ component representation. Maximum number of bits per component is 16.
mode	Contains information about the designation of data planes. Named constants to be assigned to mode are listed in Table E-5 .
data	Of 5 pointers to 3 dimensional arrays containing data for image planes. data is in 16 bit unsigned integer format accessed as data[plane][frame][row][col]

[Table E-5](#) shows the named constants for video modes with corresponding planes and representations.

Table E-5: Named Constants for Video Modes

Mode	Planes	Video Representation
FORMAT_MONO	1	Monochrome - Luminance only.
FORMAT_RGB	3	RGB image / video data
FORMAT_C444	3	444 YUV, or YCrCb image / video data
FORMAT_C422	3	422 format YUV video, (u,v chrominance channels horizontally sub-sampled)
FORMAT_C420	3	420 format YUV video, (u,v sub-sampled both horizontally and vertically)
FORMAT_MONO_M	3	Monochrome (Luminance) video with Motion.
FORMAT_RGBA	4	RGB image / video data with alpha (transparency) channel
FORMAT_C420_M	5	420 YUV video with Motion or Alpha
FORMAT_C422_M	5	422 YUV video with Motion or Alpha
FORMAT_C444_M	5	444 YUV video with Motion or Alpha
FORMAT_RGBM	5	RGB video with Motion

Working With Video_struct Containers

The `video_utils.h` file defines functions to simplify access to video data in `video_struct`.

```
int video_planes_per_mode(int mode);
int video_rows_per_plane(struct video_struct* video, int plane);
int video_cols_per_plane(struct video_struct* video, int plane);
```

Function `video_planes_per_mode` returns the number of component planes defined by the mode variable, as described in [Table E-5](#). Functions `video_rows_per_plane` and `video_cols_per_plane` return the number of rows and columns in a given plane of the selected video structure. The following example demonstrates using these functions in conjunction to process all pixels within a video stream stored in variable `in_video`, with this construct:

```
for (int frame = 0; frame < in_video->frames; frame++) {
    for (int plane = 0; plane < video_planes_per_mode(in_video->mode); plane++) {
        for (int row = 0; row < rows_per_plane(in_video,plane); row++) {
            for (int col = 0; col < cols_per_plane(in_video,plane); col++) {
                // User defined pixel operations on
                // in_video->data[plane][frame][row][col]
            }
        }
    }
}
```

Delete the Video Structure

Large arrays such as the `video_in` element in the video structure must be deleted to free up memory. As an example, the following function is defined as part of the `video_utils` package.

```
void free_video_buff(struct video_struct* video )
{
    int plane, frame, row;

    if (video->data[0] != NULL) {
        for (plane = 0; plane < video_planes_per_mode(video->mode); plane++) {
            for (frame = 0; frame < video->frames; frame++) {
                for (row = 0; row < video_rows_per_plane(video,plane); row++) {
                    free(video->data[plane][frame][row]);
                }
                free(video->data[plane][frame]);
            }
            free(video->data[plane]);
        }
    }
}
```

This function can be called in the following way to free the video input buffers (up to eight) and the video output buffer:

```
// Free Layer Buffers
for(i=0; i < generics.C_NUM_LAYERS; i++)
{
    printf("Freeing Layer Video Buffer #%d...\n", i);
    free_video_buff(&inputs.video_in[i]);
}
printf("Freeing Output Buffer...\n");
free_video_buff(&outputs.video_out);
```

Example Code

Two example C files, `run_bitacc_cmodel.c` and `run_bitacc_cmodel_config.c`, are provided. The 32-bit and 64-bit Windows and Linux executables for these examples are also included.

The `run_bitacc_cmodel` example executable provides:

- Shows a fixed implementation of the Deinterlacer
- Contains an example of how to write an application that makes all necessary function calls to the Deinterlacer C model core function.
- Contains an example of how to populate the video structures at the input and output, including allocation of memory to these structures.
- Uses a YUV file reading function to extract video information from YUV files for use by the model.
- Uses a YUV file writing function to provide an output YUV file, which allows the user to visualize the result of the core.

The `run_bitacc_cmodel` example executable does not use command line parameters. To run the executable:

1. Use the `cd` command to go to the platform directory (lin64, lin, win64 or win32).
2. Enter this command at the shell or DOS prompt:

```
run_bitacc_cmodel
```

The `run_bitacc_cmodel_config` example executable provides:

- Shows configurable implementations of the Deinterlacer configured from command line arguments.
- Includes a command line parser, allowing the user to pass parameters into the model for multiple test cases.
- Uses YUV or BMP file reading functions to extract video information from YUV or BMP files for use by the model.
- Uses YUV or BMP file writing functions to provide an output YUV or BMP file, which allows the user to visualize the result of the core.

The `run_bitacc_cmodel_config` example executable uses multiple command line parameters. To run the executable:

1. Use the `cd` command to go to the platform directory (lin64, lin, win64 or win32).
2. Enter this command at the shell or DOS prompt:

```
./run_bitacc_cmodel_config <-parameter> <value> ...
```

For example:

```
run_bitacc_cmodel_config -width 720 -height 576 -depth 8 -mode full -length 2 -source  
test_000.yuv
```

Command Line Options in Detail

The following is a detailed list of the options:

- **-core**: selects which gate-level model is run; excluding this option defaults to RTL simulation.
- **-format**: selects the input file format; possible input formats are 422YUV8, 422YUV10, 444BMP.
- **-rate**: selects output AVI files frame rate.
- **-order**: selects which field order is used to store the source files. By choosing "pal", line 1 is temporally used before line 2. By choosing NTSC, this order is reversed,
- **-pulldown**: selects the operation of the pulldown detector; it can be either switched on or off.
- **-mode**: selects what internal processing is used to generate a deinterlaced image. If "none" is selected, the output is field interpolated. If "motion" is selected, then only the motion adaptive algorithm is used. If "diag" is selected, then only the diagonal algorithm is used. If "full", then all features are enabled.
- **-cropx, -cropy, -cropxsize, -cropsy**: allow for a region of interest to be extracted from a given source image; the origin of a picture is assumed to be 0,0 and only even x offsets are allowed.
- **-width**: sets the full pixel width of the input file image and is required.
- **-height**: sets the full pixel height of the input file image and is required.
- **-length**: sets the number of files read by the chosen core; it should be set greater than three to allow enough priming of the motion adaptive datapath.
- **-txt**: used by the C model to generate a .txt equivalent file set of the source images, which are then used by the VHDL or Verilog models.
- **-source**: path and file name of the first file to be read.
- **-debug**: enables colorized images to be generated.

Initializing the Deinterlacer Input Video Structure

The easiest way to assign stimuli values to the input video structure is to initialize it with an image or video. The `bmp_util.h`, `yuv_utils.h`, `rgb_utils.h` and `video_util.h` header files packaged with the bit accurate C models contain functions to facilitate file I/O.

Bitmap Image Files

The `rgb_utils.h` and `bmp_utils.h` files declare functions that help access files in Windows bitmap format (http://en.wikipedia.org/wiki/BMP_file_format). However, this format limits color depth to a maximum of 8 bits per pixel, and operates on images with three planes (R,G,B). Consequently, the following functions operate on arguments type `rgb8_video_struct`, which is defined in `rgb_utils.h`. Also, both functions support only true color, non-indexed formats with 24 bits per pixel.

```
int write_bmp(FILE *outfile, struct rgb8_video_struct *rgb8_video);
int read_bmp(FILE *infile, struct rgb8_video_struct *rgb8_video);
```

These functions are used to dynamically allocate and free memory for RGB structure storage:

```
int alloc_rgb8_frame_buff(struct rgb8_video_struct* rgb8video );
void free_rgb_frame_buff(struct rgb_video_struct* rgb_video );
```

Exchanging data between `rgb8_video_struct` and general `video_struct` type frames/videos is facilitated by functions:

```
int copy_rgb8_to_video(struct rgb8_video_struct* rgb8_in,
struct video_struct* video_out );
int copy_video_to_rgb8( struct video_struct* video_in,
struct rgb8_video_struct* rgb8_out );
```

Note: All image / video manipulation utility functions expect both input and output structures initialized; for example, pointing to a structure that has been allocated in memory, either as static or dynamic variables. Additionally, the input structure must have the dynamically allocated containers (data, r, g, b, y, u, and v arrays) already allocated and initialized with the input frame(s). If the output container structure is pre-allocated at the time of the function call, the utility functions verify and issue an error if the output container size does not match the size of the expected output. If the output container structure is not pre-allocated, the utility functions create the appropriate container to hold results.

YUV Image/Video Files

The `yuv_utils.h` file declares functions that support file access in YUV format. These functions are used to dynamically allocate and free memory for YUV structure storage:

```
int alloc_yuv8_frame_buff(struct yuv8_video_struct* yuv8video );
void free_yuv_frame_buff(struct yuv_video_struct* yuv_video );
```

These functions allow reading and writing of YUV functions (used to initialize or write `yuv8_video` data):


```
int write_yuv(FILE *outfile, struct yuv8_video_struct *yuv8_video);
int read_yuv(FILE *infile, struct yuv8_video_struct *yuv8_video);
```

Exchanging data between yuv8_video_struct and general video_struct type frames/ videos is facilitated by functions:

```
int copy_yuv8_to_video(struct yuv8_video_struct* yuv8_in,
struct video_struct* video_out );
int copy_video_to_yuv8( struct video_struct* video_in,
struct yuv8_video_struct* yuv8_out );
```

YUV formats (4:2:0, 4:2:2 and 4:4:4) can be converted with these functions:

```
int yuv8_420to444(struct yuv8_video_struct* video_in, struct yuv8_video_struct*
video_out);
int yuv8_422to444(struct yuv8_video_struct* video_in, struct yuv8_video_struct*
video_out);
int yuv8_444to420(struct yuv8_video_struct* video_in, struct yuv8_video_struct*
video_out);
int yuv8_444to422(struct yuv8_video_struct* video_in, struct yuv8_video_struct*
video_out);
```

Binary Image/Video Files

The video_utils.h file declares functions that help load and save generalized video files in raw, uncompressed format. These functions effectively serialize the video_struct structure:

```
int read_video( FILE* infile, struct video_struct* in_video);
int write_video(FILE* outfile, struct video_struct* out_video);
```

The corresponding file contains a small, plain text header defining, "Mode", "Frames", "Rows", "Columns", and "Bits per Pixel". The plain text header is followed by binary data, 16-bits per component in scan line continuous format. Subsequent frames contain as many component planes as defined by the video mode value selected. Also, the size (rows, columns) of component planes can differ within each frame as defined by the actual video mode selected.

These functions are used to dynamically allocate and free memory for video structure storage:

```
int alloc_video_buff(struct video_struct* video );
void free_video_buff(struct video_struct* video );
```

Compiling on 32-bit and 64-bit Windows Platforms

Precompiled library deinterlacer_v2_0_bitacc_cmodel.lib, top level demonstration code run_bitacc_cmodel_config.c and example code run_bitacc_cmodel.c must be compiled with an ANSI C compliant compiler under Windows 32-bit or Windows 64-bit. This section describes an example using Microsoft Visual Studio. In Visual Studio create a new, empty Win32 Console Application project. As existing items, add:

- `libIpdeinterlacer_v2_0_bitacc_cmodel.lib` to the "Resource Files" folder of the project
- `run_bitacc_cmodel.c` or the `run_bitacc_cmodel_config.c` to the "Source Files" folder of the project
- `deinterlacer_v2_0_bitacc_cmodel.h` header file to the "Header Files" folder of the project
- `bmp_utils.h` file to the "Header Files" folder of the project
- `rgb_utils.h` file to the "Header Files" folder of the project
- `video_fio.h` file to the "Header Files" folder of the project
- `video_utils.h` file to the "Header Files" folder of the project
- `yuv_utils.h` file to the "Header Files" folder of the project

To build the x64 executable for 64-bit Windows platforms, perform these steps. These steps can be skipped if building the Win32 executable.

1. Right-click on the solution in the Solution Explorer and click Properties at the bottom of the pop-up menu.
2. Click **Configuration Manager**.
3. In the Active solution platform drop-down box, select <New...>.
4. In the new platform drop-down box, select x64 and click OK. Make sure that all the projects now have x64 as the default platform in the Configuration Manager.
5. After the project is created and populated, it must be compiled and linked (built) to create a Win32 or x64 executable. To perform the build step, select Build Solution from the Build menu. An executable matching the project name is created either in the Debug or Release subdirectories under the project location based on whether "Debug" or "Release" has been selected in the "Configuration Manager" under the Build menu.

Note: The `run_bitacc_cmodel.c` file is an example demonstration that reads no input but generates an output `.yuv` file from internally generated test patterns. The `run_bitacc_cmodel_config.c` file is a configurable demonstration and requires several input files to run. See Running the Executables for information on command line arguments and input file formats.

Compiling under 32-bit and 64-bit Linux Platforms

Example Demonstration

To compile the example demonstration, go to the directory where the header files, the library files and `run_bitacc_cmodel.c` were unpacked. The libraries and header files are

referenced during the compilation and linking process. In this directory, perform these steps:

1. Set your LD_LIBRARY_PATH environment variable to include the root directory where the model zip file was unzipped. For example:

```
setenv LD_LIBRARY_PATH <unzipped_c_model_dir>:${LD_LIBRARY_PATH}
```

2. Copy these files from the /lin32 or /lin64 directory to the root directory:

```
libstlport.so.5.1
libIp_deinterlacer_v2_0_bitacc_cmodel.so
```

3. In the root directory, compile using the GNU C Compiler by typing this command at the shell prompt:

```
gcc -m32 -x c++ ../run_bitacc_cmodel.c ../parsers.c -o
run_bitacc_cmodel -L. -lIp_deinterlacer_v2_0_bitacc_cmodel -Wl,-rpath,.
gcc -m64 -x c++ ../run_bitacc_cmodel.c ../parsers.c -o
run_bitacc_cmodel -L. -lIp_deinterlacer_v2_0_bitacc_cmodel -Wl,-rpath,.
```

4. This results in the creation of the executable run_bitacc_cmodel, which can be run using this command:

```
./run_bitacc_cmodel
```

A make file is also included that runs GCC. To clean the executable and compile the example code, enter this command at the shell prompt:

```
make clean all
```

Configurable Demonstration

To compile the configurable demonstration, go to the directory where the header files, the library files and run_bitacc_cmodel_config.c were unpacked. The libraries and header files are referenced during the compilation and linking process. In this directory perform these steps:

1. Set your LD_LIBRARY_PATH environment variable to include the root directory where the model zip-file was unzipped. For example:

```
setenv LD_LIBRARY_PATH <unzipped_c_model_dir>:${LD_LIBRARY_PATH}
```

2. Copy these files from the /lin64 directory to the root directory:

```
libstlport.so.5.1
libIp_deinterlacer_v2_0_bitacc_cmodel.so
```

3. In the root directory, compile using the GNU C Compiler by entering this command at the shell prompt:

```
gcc -x c++ run_bitacc_cmodel_config.c -o run_bitacc_cmodel_config -L.
-lIp_deinterlacer_v2_0_bitacc_cmodel -Wl,-rpath,.
```

4. This results in the creation of the executable `run_bitacc_cmodel`, which can be run using this command:

```
./run_bitacc_cmodel_config <-parameter> <value> ...
```

For example:

```
run_bitacc_cmodel_config -width 720 -height 576 -depth 8 -mode full -length 2 -source test_000.yuv
```

A make file is also included that runs GCC. To clean the executable and compile the example code, enter this following command at the shell prompt:

```
make clean run_bitacc_cmodel_config
```

Running the Executables

Included in the zip file are precompiled executable files for use with 32-bit and 64-bit Windows and Linux platforms. The instructions for running on each platform are included in this section.

Example Demonstration

The example demonstration does not use command line parameters. To run on a 32-bit or 64-bit Linux platform, perform these steps:

1. Set your `$LD_LIBRARY_PATH` environment variable to include the root directory where the model zip file was unzipped. For example:

```
setenv LD_LIBRARY_PATH <unzipped_c_model_dir>:${LD_LIBRARY_PATH}
```

2. Copy these files from the `/lin64` (for 64-bit Linux) or from the `/lin` (for 32-bit Linux) directory to the root directory:

```
libstlport.so.5.1  
libIp_deinterlacer_v2_0_bitacc_cmodel.so  
run_bitacc_cmodel
```

3. Execute the model. From the root directory, enter this command at a shell prompt:

```
run_bitacc_cmodel
```

To run on a 32-bit or 64-bit Windows platform, perform these steps:

1. Copy this file from the `/nt64` (for 64-bit Windows) or from the `/nt` (for 32-bit Windows) directory to the root directory:

```
run_bitacc_cmodel.exe
```

2. Execute the model. From the root directory, enter this command at a DOS prompt:

```
run_bitacc_cmodel
```

During successful execution, the `c_deint0000.bmp` file is created in the directory containing the `run_bitacc_cmodel` executable. This file bitmap file. The example demonstration is set up to generate 15 frames of video data at 200x120 24-bit format.

Configurable Demonstration

The configurable demonstration takes multiple command line parameters. To run on a 32-bit or 64-bit Linux platform, perform these steps:

1. Set your `$LD_LIBRARY_PATH` environment variable to include the root directory where the model zip-file was unzipped. For example:

```
setenv LD_LIBRARY_PATH <unzipped_c_model_dir>:${LD_LIBRARY_PATH}
```

2. Copy these files from the `/lin64` (for 64-bit Linux) or from the `/lin` (for 32-bit Linux) directory to the root directory:

```
libstlport.so.5.1  
libIp_deinterlacer_v2_0_bitacc_cmodel.so  
run_bitacc_cmodel_config
```

3. Execute the model. From the root directory, enter this command at a shell prompt:

```
./run_bitacc_cmodel_config <-parameter> <value> ...
```

For example:

```
run_bitacc_cmodel_config -width 720 -height 576 -depth 8 -mode full -length 2 -source  
test_000.yuv
```

To run on a 32-bit or 64-bit Windows platform, perform these steps:

1. Copy this file from the `/nt64` (for 64-bit Windows) or from the `/nt` (for 32-bit Windows) directory to the root directory:

```
run_bitacc_cmodel_config.exe
```

2. Execute the model. From the root directory, enter this command at a DOS prompt:

```
./run_bitacc_cmodel_config <-parameter> <value> ...
```

For example:

```
run_bitacc_cmodel_config -width 720 -height 576 -depth 8 -mode full -length 2 -source  
test_000.yuv
```

During successful execution, multiple bitmap files are created in the directory containing the `run_bitacc_cmodel_config` executable.

Each individual simulation is invoked using a binary executable script and some command line parameters. The main parameters are used to steer the test and its target. The options for a test are shown in [Table E-6](#).

Table E-6: Simulation Options

Option Name	Description	Option Values	Default
depth	Bit depth of video stream	8 10 12	10
format	File format used	yuv8 yuv10 bmp	yuv8
packing	Pixel packing structure	444 422 420	444
pulldown	Cadence detector	off on	off
mode	Deinterlacing type	full none motion diag	full
cropx	Cropping Top Left X	<numeric value>	0
copyy	Cropping Top Left Y	<numeric value>	0
cropxsize	Cropping X size	<numeric value>	<default to width>
cropysize	Cropping Y size	<numeric value>	<default to height>
width	Input File Pixel width	<numeric value>	<error if missing>
height	Input File Pixel height	<numeric value>	<error if missing>
length	Number of files in sequence	<numeric value>	<error if missing>
source	Sequence filename	<filename>	<error if missing>
golden	Sequence filename	<filename>	<used only by compare>
debug	Generate debug images	<numeric value>	0

The "source", "length", "width" and "height" parameters are mandatory, all other missing fields are set to their default.

The following command line shows how to run a C model based, 8-bit full deinterlacer on sequence files "test000":

```
run_bitacc_cmodel_config -width 720 -height 576 -depth 8 -mode full -length 2 -source test_000.yuv
```

When running the C model output, two additional AVI files are generated. The first is an animated version of the full deinterlaced sequence, and the second is a side-by-side comparison movie of the motion adaptive and full deinterlacer in operation. This second AVI file allows for easy visual comparison of the outputs. The user can preset the AVI frame rate on the command line.

Simulation Options in Detail

The following is a detailed list of the options:

- **-core:** selects which gate-level model is run; excluding this option defaults to RTL simulation.

- **-format**: selects the input file format; possible input formats are 422YUV8, 422YUV10, 444BMP.
- **-rate**: selects output AVI files frame rate.
- **-order**: selects which field order is used to store the source files. By choosing "pal", line 1 is temporally used before line 2. By choosing NTSC, this order is reversed,
- **-pulldown**: selects the operation of the pulldown detector; it can be either switched on or off.
- **-mode**: selects what internal processing is used to generate a deinterlaced image. If "none" is selected, the output is field interpolated. If "motion" is selected, then only the motion adaptive algorithm is used. If "diag" is selected, then only the diagonal algorithm is used. If "full", then all features are enabled.
- **-cropx, -cropy, -cropxsize, -cropysize**: allow for a region of interest to be extracted from a given source image; the origin of a picture is assumed to be 0,0 and only even x offsets are allowed.
- **-width**: sets the full pixel width of the input file image and is required.
- **-height**: sets the full pixel height of the input file image and is required.
- **-length**: sets the number of files read by the chosen core; it should be set greater than three to allow enough priming of the motion adaptive datapath.
- **-txt**: used by the C model to generate a .txt equivalent file set of the source images, which are then used by the VHDL or Verilog models.
- **-source**: path and file name of the first file to be read.
- **-debug**: enables colorized images to be generated.

Additional Resources

Xilinx Resources

For support resources such as Answers, Documentation, Downloads, and Forums, see the Xilinx Support website at:

<http://www.xilinx.com/support>.

For a glossary of technical terms used in Xilinx documentation, see:

http://www.xilinx.com/support/documentation/sw_manuals/glossary.pdf.

For a comprehensive listing of Video and Imaging application notes, white papers, reference designs and related IP cores, see the Video and Imaging Resources page at:

http://www.xilinx.com/esp/video/refdes_listing.htm#ref_des.

Solution Centers

See the [Xilinx Solution Centers](#) for support on devices, software tools, and intellectual property at all stages of the design cycle. Topics include design assistance, advisories, and troubleshooting tips.

References

These documents provide supplemental material useful with this user guide:

1. DS768, AXI Interconnect IP Data Sheet
2. [UG761 AXI Reference Guide](#)

Technical Support

Xilinx provides technical support at www.xilinx.com/support for this LogiCORE™ IP product when used as described in the product documentation. Xilinx cannot guarantee timing, functionality, or support of product if implemented in devices that are not defined in the documentation, if customized beyond that allowed in the product documentation, or if changes are made to any section of the design labeled DO NOT MODIFY.

See the IP Release Notes Guide ([XTP025](#)) for more information on this core. For each core, there is a master Answer Record that contains the Release Notes and Known Issues list for the core being used. The following information is listed for each version of the core:

- New Features
- Resolved Issues
- Known Issues

Ordering Information

The Video Deinterlacer v2.0 core is provided under the [Xilinx Core License Agreement](#) and can be generated using the Xilinx® CORE Generator™ system. The CORE Generator system is shipped with Xilinx ISE® Design Suite software.

Contact your local Xilinx [sales representative](#) for pricing and availability of additional Xilinx LogiCORE IP modules and software. Information about additional Xilinx LogiCORE IP modules is available on the Xilinx [IP Center](#).

Revision History

The following table shows the revision history for this document.

Date	Version	Revision
10/19/2011	1.0	Initial Xilinx release of the IP core
4/24/2012	2.0	Updated for core version.

Notice of Disclaimer

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials or to notify you of updates to the Materials or to product specifications. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.

© Copyright 2011 Xilinx, Inc. Xilinx, the Xilinx logo, Artix, ISE, Kintex, Spartan, Virtex, Zynq, and other designated brands included herein are trademarks of Xilinx in the United States and other countries. All other trademarks are the property of their respective owners.